



University of HUDDERSFIELD

University of Huddersfield Repository

Park, Kyoo-seon, Asim, Taimoor and Mishra, Rakesh

Computational Fluid Dynamics based Fault Simulations of a Vertical Axis Wind Turbines

Original Citation

Park, Kyoo-seon, Asim, Taimoor and Mishra, Rakesh (2012) Computational Fluid Dynamics based Fault Simulations of a Vertical Axis Wind Turbines. *Journal of Physics: Conference Series*, 364 (1). 012138. ISSN 1742-6596

This version is available at <http://eprints.hud.ac.uk/id/eprint/13578/>

The University Repository is a digital collection of the research output of the University, available on Open Access. Copyright and Moral Rights for the items on this site are retained by the individual author and/or other copyright owners. Users may access full items free of charge; copies of full text items generally can be reproduced, displayed or performed and given to third parties in any format or medium for personal research or study, educational or not-for-profit purposes without prior permission or charge, provided:

- The authors, title and full bibliographic details is credited in any copy;
- A hyperlink and/or URL is included for the original metadata page; and
- The content is not changed in any way.

For more information, including our policy and submission procedure, please contact the Repository Team at: E.mailbox@hud.ac.uk.

<http://eprints.hud.ac.uk/>

Computational Fluid Dynamics based Fault Simulations of a Vertical Axis Wind Turbines

Kyoo-seon Park, Taimoor Asim and Rakesh Mishra

School of Computing & Engineering,
University of Huddersfield,
Queensgate, Huddersfield HD1 3DH, UK

E-mail: kyoo-seon.park@hud.ac.uk, taimoor.asim@hud.ac.uk, r.mishra@hud.ac.uk

Abstract. Due to depleting fossil fuels and a rapid increase in the fuel prices globally, the search for alternative energy sources is becoming more and more significant. One of such energy source is the wind energy which can be harnessed with the use of wind turbines. The fundamental principle of wind turbines is to convert the wind energy into first mechanical and then into electrical form. The relatively simple operation of such turbines has stirred the researchers to come up with innovative designs for global acceptance and to make these turbines commercially viable. Furthermore, the maintenance of wind turbines has long been a topic of interest. Condition based monitoring of wind turbines is essential to maintain continuous operation of wind turbines. The present work focuses on the difference in the outputs of a vertical axis wind turbine (VAWT) under different operational conditions. A Computational Fluid Dynamics (CFD) technique has been used for various blade configurations of a VAWT. The results indicate that there is significant degradation in the performance output of wind turbines as the number of blades broken or missing from the VAWT increases. The study predicts the faults in the blades of VAWTs by monitoring its output.

1. Introduction

The need for sustainable energy sources becomes greater each year due to the continued depletion of fossil fuels. To harness such types of energy, wind turbines are now seen as the most logical choice due to their well-established performance credentials along with relatively short payback times. Among the different types of wind turbines, the most common type is Horizontal Axis (HAWT) in which the primary axis of rotation is parallel to the ground. Another type of wind turbine in use is the vertical axis wind turbine in which the rotational axis is normal to the ground. The main attraction of the VAWT is its simplicity of design which allows for energy conversion at any wind angle. Furthermore its requirement of low starting torque, coupled with low noise, makes it an ideal candidate for use within urban areas where wind speeds are relatively low [1,2,3].

According to Gareth et. al [4], the important performance parameters for wind turbines are the torque output, power output and the tip speed ratio (TSR). The tip speed ratio of a VAWT can be calculated by:

Nomenclature

r	Radius of VAWT (m)
ω	Angular velocity (rads/sec)
V	Linear velocity (m/sec)
P	Power (W)
T	Torque (N-m)

$$\lambda = \frac{r * \omega}{V} \quad (1)$$

Power of a VAWT, which is a function of the rotational speed and the torque output of the wind turbine, can be calculated using the following expression:

$$P = \omega * T \quad (2)$$

The wind farms need to continuously operate at peak efficiency to maintain consistent output. Extensive research is currently being carried out to investigate effects of various fault conditions on the output of such systems. In the present study, an attempt has been made to simulate some common faults and their effects on torque/power outputs of a single vertical axis wind turbine.

2. Numerical Modelling

The model of the VAWT used for analysis is shown in figure 1. This VAWT consists of 12 rotor and stator blades each. The diameter of the stator is 2m and that of the rotor is 1.4m. Because of the simple design of VAWTs, the effect of crosswinds is negligible and the flow component shown in figure 1 covers a wide range of operational conditions of the VAWTs being used.

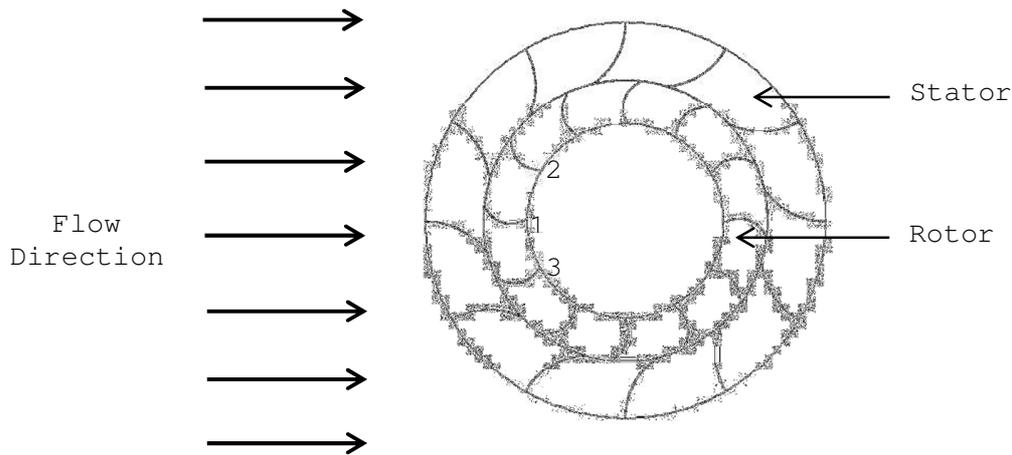


Figure 1. Healthy state VAWT model.

In order to effectively use CFD as a condition monitoring tool for VAWTs, four different blade configurations have been selected for analysis to cover a wide range of faults in the wind turbines. The first configuration is termed as healthy state and is shown in figure 1. In this configuration all the blades of the VAWT are in their original shape and positions. The details of all the configurations that were taken into account are summarised in table 1.

Table 1. Geometric configurations of VAWTs being analysed.

Condition	Missing Blade/s
Healthy	N/A
One blade missing	1
Two blades missing	1 and 2
Three blades missing	1, 2 and 3

Due to limited computational resources, only two dimensional model as shown in figure 1 has been taken into account for the analysis. Transient Navier-Stokes equations are solved numerically for a turbulent flow of air at a speed of 4m/sec into the VAWT. This corresponds to a tip speed ratio of 0.2. The Sliding Mesh technique is used in order to rotate the blades in the rotor at $\omega = 1.143$ rad/sec which corresponds to 11rpms for the VAWT. The equations are solved using iterative method such that each time step corresponds to 3° rotation of the rotor blades. Second order spatial and temporal schemes have been specified with SIMPLE pressure-velocity coupling in the solver. The torque output of the VAWT is monitored throughout the iterative process. For transient models, the solution needs to become statistically steady first in order to accurately obtain the results from them. In the present work, the model becomes statistically steady after four revolutions of the VAWT. The data is collected only in the fifth revolution which depicts that the non-uniformities in the solution have died out. The convergence is summarised in table 2.

Table 2. Convergence summary for MRF of VAWT.

Condition	Revolution	Average Torque Output (N-m)	Percentage Difference (%)
Healthy	1	14.16101	
	2	13.90946	1.77639
	3	13.90182	0.054927
	4	13.89648	0.038403
	5	13.8953	0.008491

One blade missing	1	14.14516	
	2	13.99035	1.094431
	3	13.98687	0.024882
	4	13.98693	-0.00041
	5	13.98586	0.007658
Two blades missing	1	20.2543	
	2	13.6372	32.6703
	3	13.6326	0.0335
	4	13.6271	0.0406
	5	13.6204	0.0494
Three blades missing	1	12.53856	
	2	12.94866	-3.27072
	3	12.94299	0.043779
	4	12.94503	-0.01578
	5	12.94207	0.022848

It can be clearly seen in table 1 that the solution of the model is changing significantly in the initial revolutions. For example, the percentage difference in the average torque output from the VAWT between the first two revolutions when two blades of the VAWT are missing is 32.67%. This indicated that the solution is changing at a fast rate. The percentage difference in the torque output for the same VAWT configuration between fourth and the fifth revolutions has dropped to 0.049%. This shows that the solution has become statistically steady. Further revolutions of the VAWT will yield almost similar torque output values.

3. Results

The results correspond to fifth revolution of the VAWT under consideration, once it has reached a statistically steady state.

3.1 Healthy State

The torque output from the VAWT for healthy state blade configuration shown in figure 2. Torque output has been normalised with average torque from the VAWT. The plot shows two different peak sets i.e. higher peaks and lower peaks. The corresponding VAWT orientations are shown in figures 3 and 4 for higher and lower peaks respectively. Furthermore, figure 2 shows lowest torque output values at specific orientations of the VAWT. One of these orientations can be seen in figure 5.

The result shown in figure 2 depicts that the highest normalised torque output from the VAWT has an average value of 1.033. It occurs when the rotor and stator blades are in line with each other; making

continuous passages for the flow (see figure 3). The blade's configuration, when the rotor blades are exactly in the middle of two stator blades (see figure 4), corresponds to the lower peaks in the plot, having an average normalised torque output of 1.005. The flow, after exiting the stator blades, comes across two uniform passages being divided by the rotor blades. All non-uniform passages (see figure 5) degrade the torque output from the VAWT and correspond to the pits in figure 2.

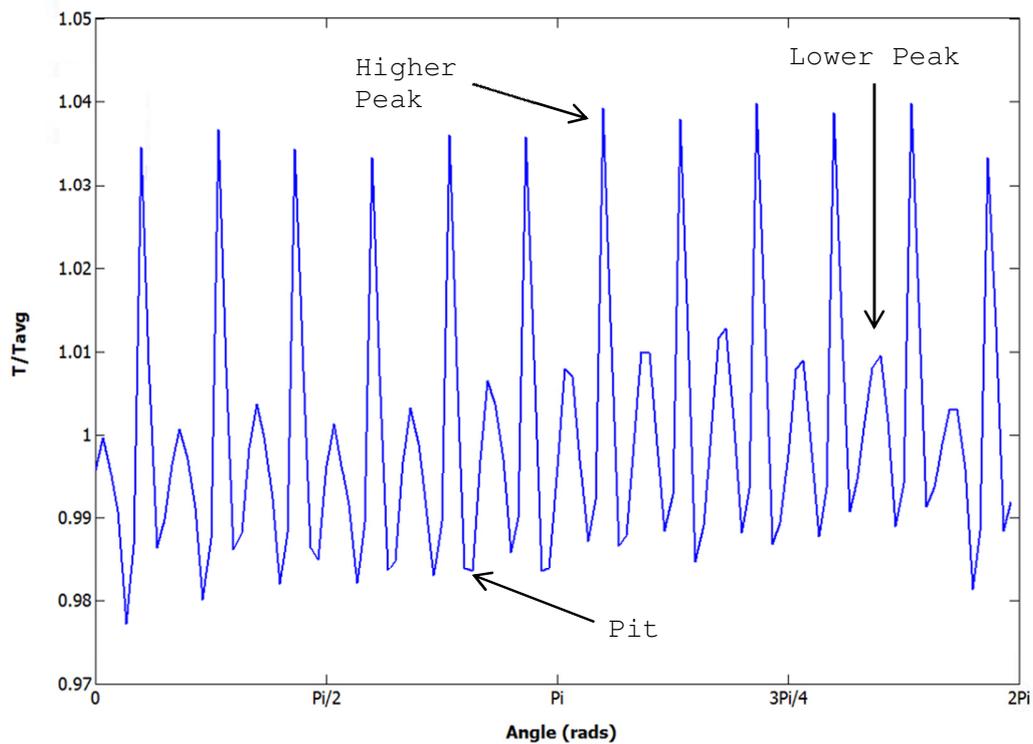


Figure 2. Normalised torque output at healthy state of the VAWT.




Figure 3. Blades orientation at higher peaks.




Figure 4. Blades orientation at lower peaks.




Figure 5. Blades orientation at pits.

3.2 One Blade Missing Condition

Figure 6 shows the normalised torque output from the VAWT when blade number 1, shown in figure 1, is missing from the model. The plot shows that the difference between the values of higher and lower peaks has been reduced significantly due to the degradation of the VAWT's performance. The average value of normalised torque output for in-line stator and rotor blades, which corresponds to higher peaks, is 1.031. Similarly, the average value of normalised torque output for the blade configurations when the rotor blades are in middle of two consecutive stator blades, and vice versa, is 1.009. Hence, there is a decrease of 0.138% in the value of higher peaks and an increase of 0.37% in the values of lower peaks on average as compared to the corresponding healthy state average torque output values from the VAWT. Furthermore, the difference in the average torque output between the highest peak and the lowest pit is 0.34 for one blade missing condition. This value is 0.058 in the case of healthy state VAWT. This increase in the torque output variations is due to the vibration of the VAWT which makes it more sensitive and degrades its performance.

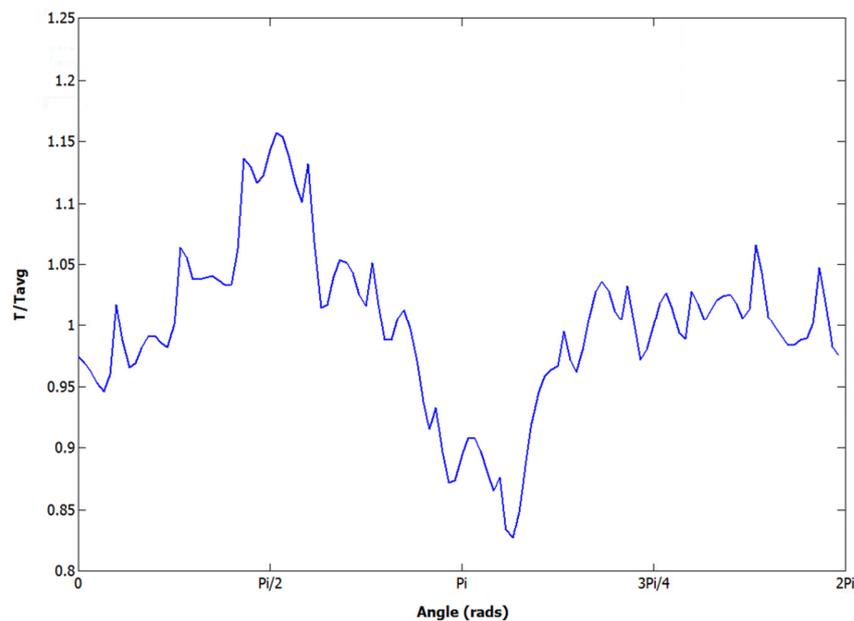


Figure 6. Normalised torque output for one blade missing condition of the VAWT.

There exists a pit in the above plot at 204° orientation of the rotor blades. The reason for this further degradation of the VAWT's performance is due to the fact that there exists a low pressure region in the stator of the VAWT. This can be clearly seen in the static pressure distribution in the VAWT shown in figure 7.

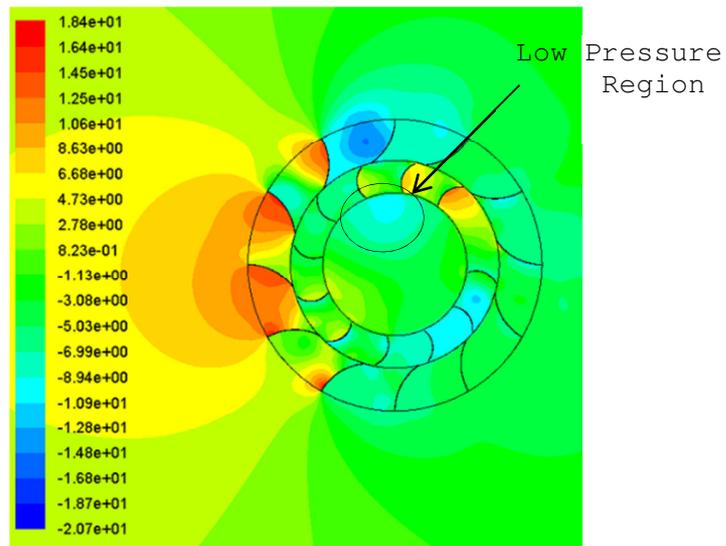


Figure 7. Static pressure (Pa) variations in the VAWT for one blade missing condition.

The corresponding power output of the VAWT is shown in figure 8. It can be seen that the power output from the VAWT is highly dependent on the orientation of the missing rotor blade.

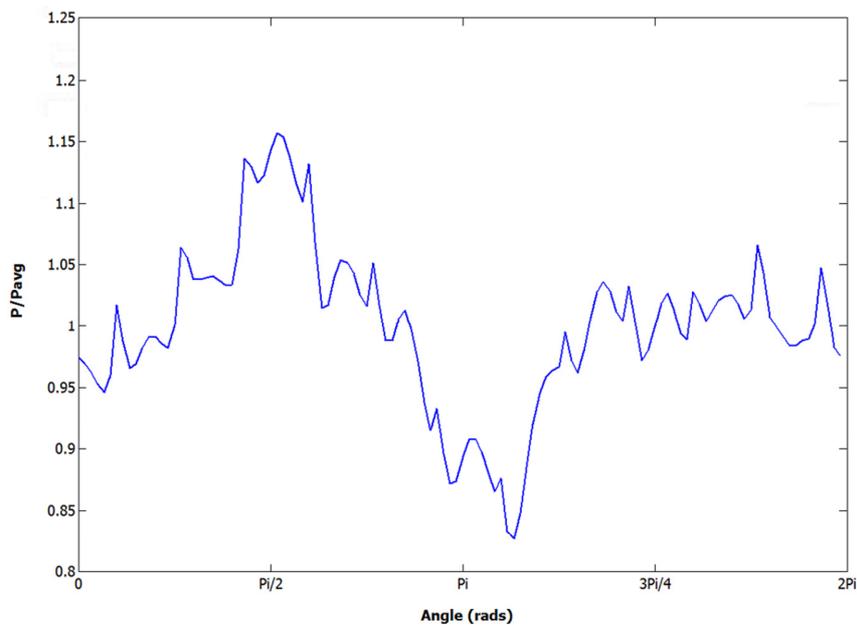


Figure 8. Normalised power output for one blade missing condition of the VAWT.

3.3 Two and Three Blades Missing Conditions

The performance of the VAWT for two and three blades missing configurations show the same trend as that for one blade missing configuration. The results for the normalised torque outputs are shown in figures 9 and 10. The average values of higher and lower peaks are summarised in table 3.

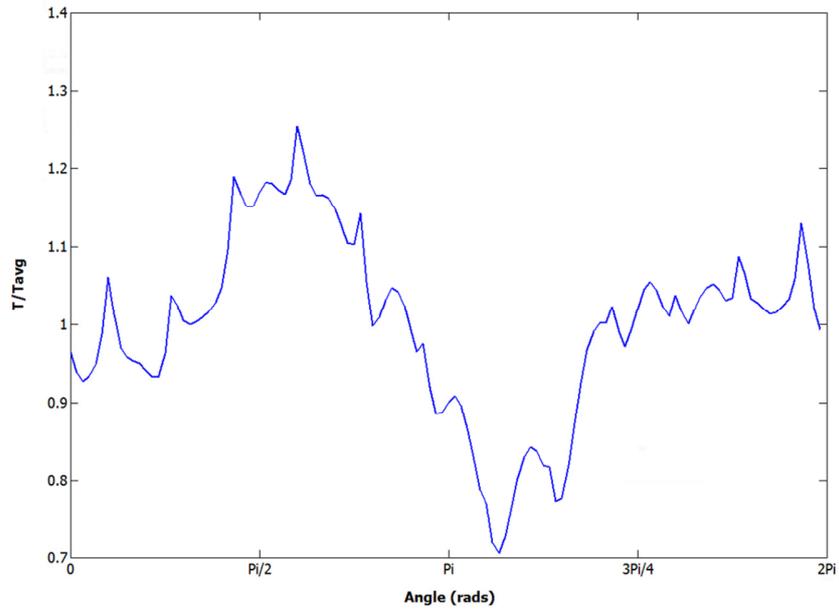


Figure 9. Normalised torque output for two blades missing condition of the VAWT.

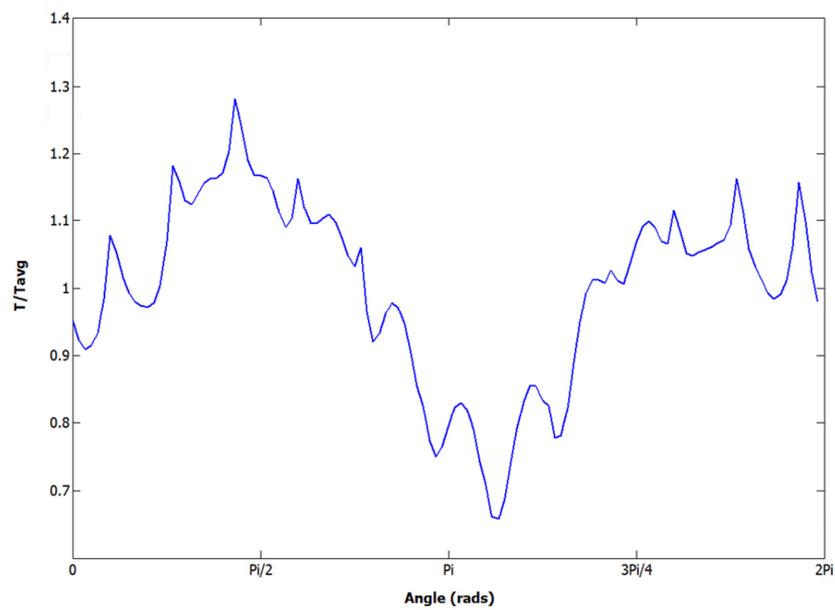


Figure 10. Normalised torque output for three blades missing condition of the VAWT.

The plots show that the average torque output from the VAWT decreases as the number of missing blades increases. This is summarised in table 4.

Table 3. Average normalised torque outputs for two and three blades missing conditions of the VAWT.

Condition	Higher peaks average value	Percentage increase from Healthy State	Lower peaks average value	Percentage decrease from Healthy state
Two blades missing	1.043	1.028	1.002	0.274
Three blades missing	1.049	1.538	1.001	0.427

Table 4. Comparison of different VAWT configuration outputs.

Condition	Torque Output	Power Output	Percentage Difference w.r.t. Healthy State
	(N-m)	(W)	(%)
Healthy State	13.89	15.88	
One blade missing	13.98	15.98	0.64
Two blades missing	13.62	15.57	1.94
Three blades missing	12.94	14.79	6.84

4. Conclusions

Numerical study of CFD based condition monitoring of vertical axis wind turbines has been presented. One healthy state and three different faulty blade configurations were modelled and solved iteratively using finite volume method in a commercially available CFD package. The results indicate that the fault in the VAWT leads to performance degradation of vertical axis wind turbines. As the number of missing blades increases, the torque and power outputs from the VAWT decrease. CFD based condition monitoring helps detecting faults in the blades of VAWTs.

References

- [1] J.Walker (2009), Renewable energies: How far can they take us?
- [2] BTM Consultants (2008), World market update 2007
- [3] J.K.Lemming et al (2009), Future wind energy technology and CO2 perspectives
- [4] Colley, Gareth and Mishra, Rakesh (2011) Computational flow field analysis of a Vertical Axis Wind Turbine. International Conference on Renewable Energies and Power Quality (ICREPPQ'11), 13-15 April 2011, Las Palmas de Gran Canaria, Spain