



University of HUDDERSFIELD

University of Huddersfield Repository

Pislaru, Crinela

Modelling and Simulation of the Dynamic Behaviour of Wheel-Rail Interface

Original Citation

Pislaru, Crinela (2012) Modelling and Simulation of the Dynamic Behaviour of Wheel-Rail Interface. In: IET Event: The Railway Wheel-Rail Interface: Damage Mechanisms and Potential Solutions, 5 March 2012, University of Huddersfield.

This version is available at <http://eprints.hud.ac.uk/id/eprint/13670/>

The University Repository is a digital collection of the research output of the University, available on Open Access. Copyright and Moral Rights for the items on this site are retained by the individual author and/or other copyright owners. Users may access full items free of charge; copies of full text items generally can be reproduced, displayed or performed and given to third parties in any format or medium for personal research or study, educational or not-for-profit purposes without prior permission or charge, provided:

- The authors, title and full bibliographic details is credited in any copy;
- A hyperlink and/or URL is included for the original metadata page; and
- The content is not changed in any way.

For more information, including our policy and submission procedure, please contact the Repository Team at: E.mailbox@hud.ac.uk.

<http://eprints.hud.ac.uk/>

Modelling And Simulation Of The Dynamic Behaviour Of Wheel-Rail Interface

Dr Crinela Pislaru

Diagnostic Engineering Research Centre




Contents

- 2D wheel-rail contact model
- 3D wheel-rail contact model
- Dynamic Behaviour of the Wheelset on the Track
- Conclusions and Future Work




Wheel-rail contact forces

- N represents the Normal Contact Force acting directly on the rail as a result of the axle load, wheelset mass and contact angle.
- F_x represents the longitudinal creep force acting in the rolling direction of the wheel.
- F_y represents the lateral creep force acting in the lateral direction of the wheel.
- M_z represents the spin creep moment caused as a result rotation of the wheel in the vertical z direction due to wheel conicity

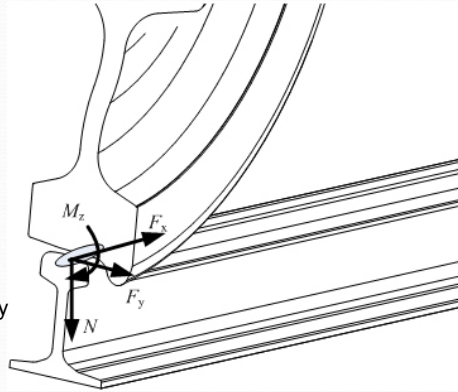

Normal Contact Problem

- Normal contact problem involves calculating the normal contact forces acting on the wheel-rail contact.
- f (contact angle, axle load of the wheelset, wheelset weight).
- The calculated normal forces are used to determine the contact patch shape, size and dimension using Hertz Contact Theory.


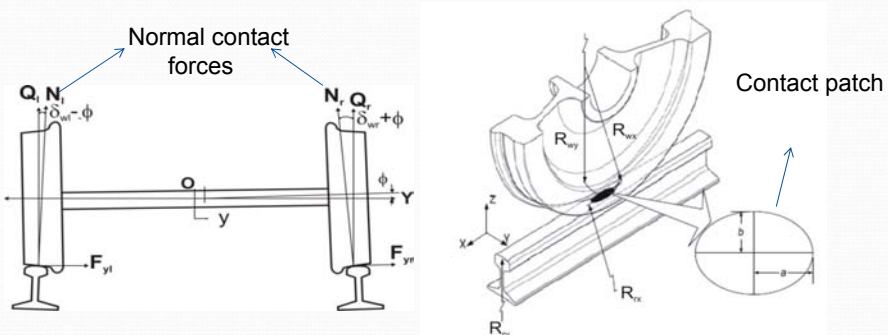


Tangential Contact Problem


- **Tangential contact problem** → creepages and tangential creep forces developed in the wheel-rail contact as a result of acceleration, braking or traction.
- **Kalker's linear theory** → lateral, longitudinal and spin creep forces (for small creepages)
- **For large creepages** - Heuristic non-linear model is used to limit the creep forces. Prevents excessive damage to the wheels
Reduces probability of derailment
- Calculated creep forces & lateral, longitudinal and spin creep moments → determine **total lateral force and spin moment force acting on the wheelset.**
- The lateral and yaw behaviour of the wheelset on the track is investigated by applying Newton's 2nd law of motion.

2D WHEEL-RAIL CONTACT MODEL


Diagnostic Engineering Research Centre

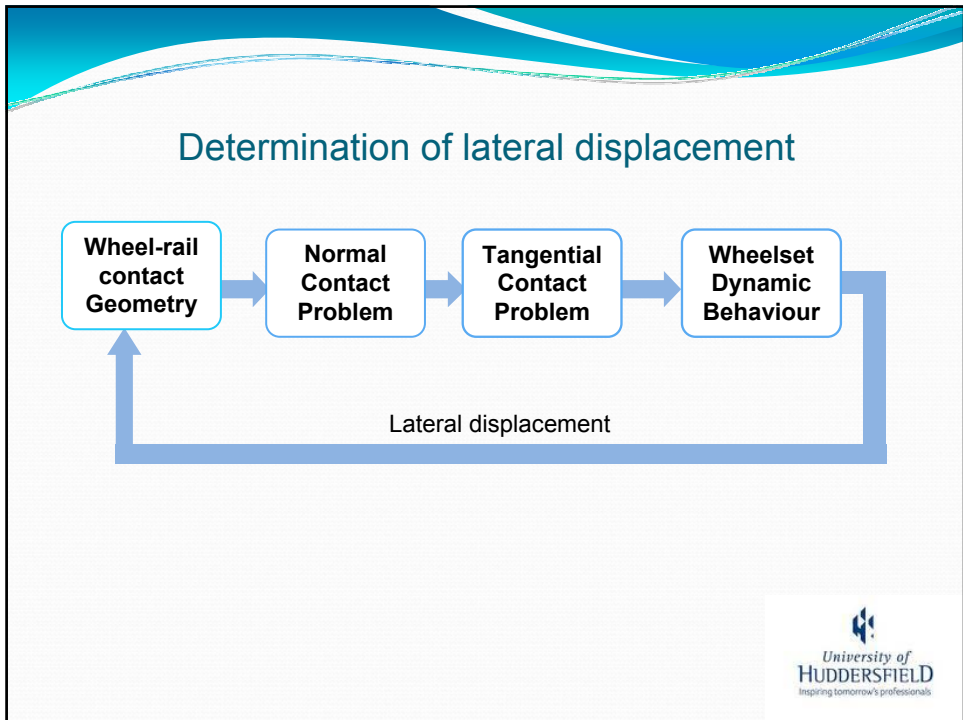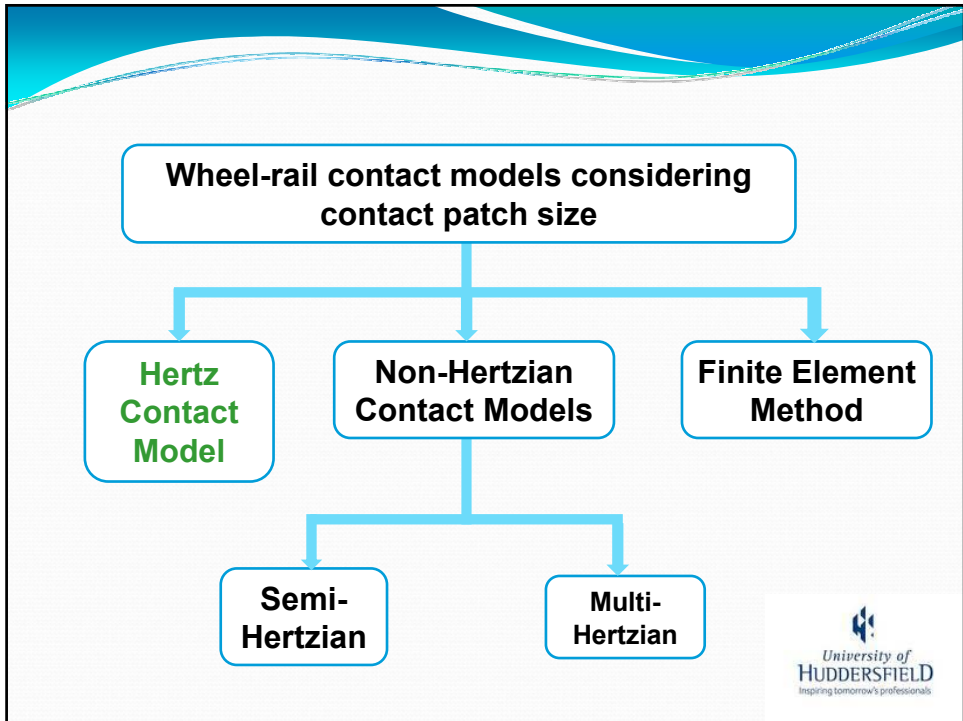

Wheel-rail contact geometry

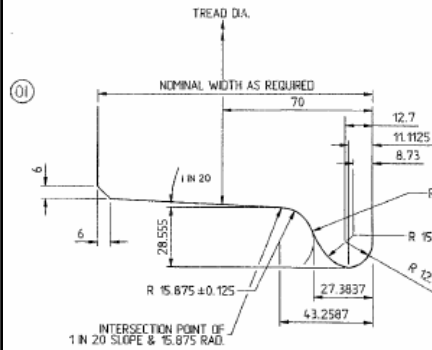


Wheel profile P1
Rail profile BS113A

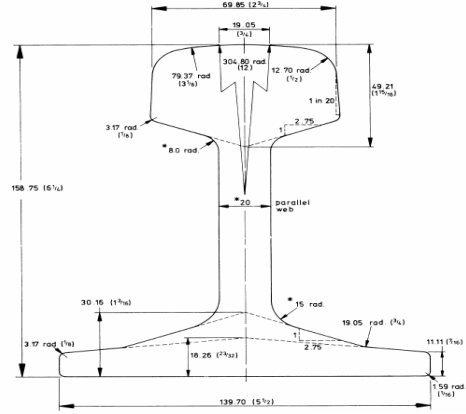


*True metric dimensions.

Figure 23 — BS rail section no. 1:


Wheel-rail contact geometry

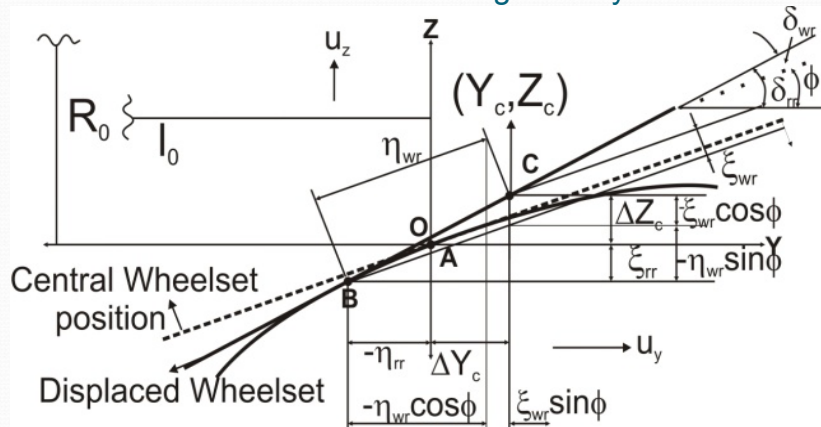


Wheel-rail contact geometry

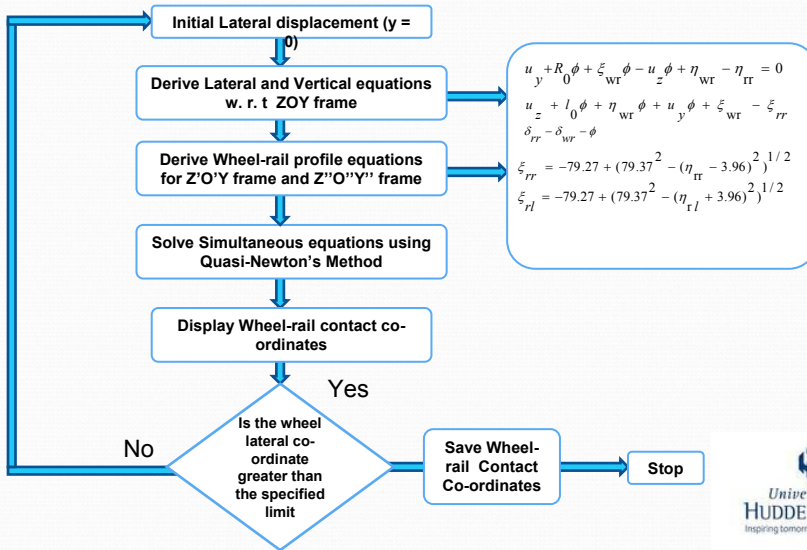

Wheel-rail contact geometry

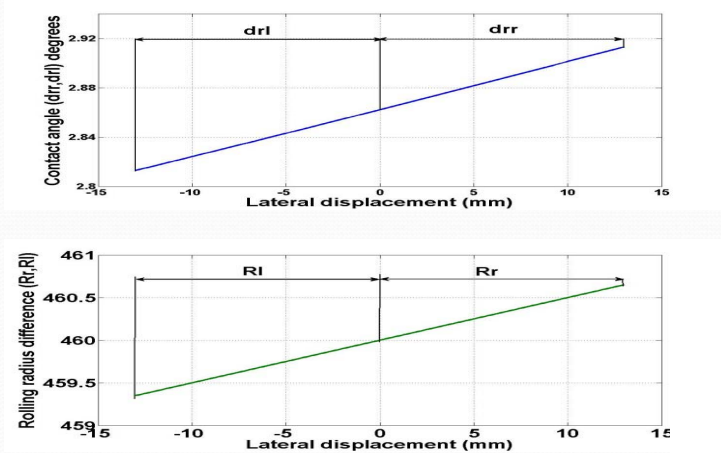

Normal Contact Problem

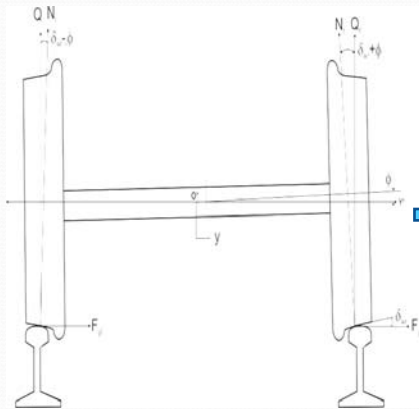

$$\begin{cases} N_r \cos(\delta_{wr} + \phi) + N_l \cos(\delta_{wl} - \phi) = (W + mg) \\ N_r \sin(\delta_{wr} + \phi) - N_l \sin(\delta_{wl} - \phi) = -(W + mg)\phi \end{cases}$$

Normal Contact Problem

Relative Curvatures Coefficients


$$A = \frac{1}{2R_{wx}} + \frac{1}{2R_{wy}}$$

$$B = \frac{1}{2R_{rx}} + \frac{1}{2R_{ry}}$$


Contact patch semi-axis

$$a = m \left(\frac{3(1-\nu^2)}{2E(A+B)} \right)^{1/3} \times N^{1/3}$$

$$b = n \left(\frac{3(1-\nu^2)}{2E(A+B)} \right)^{1/3} \times N^{1/3}$$

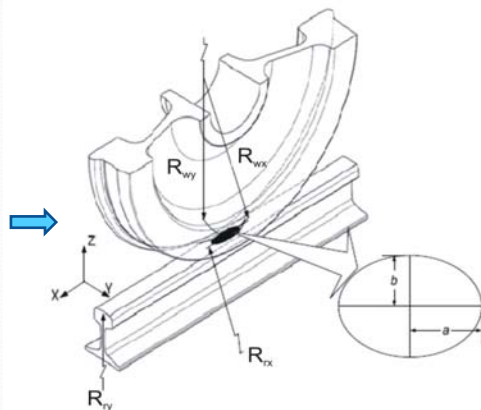


Normal Contact Problem

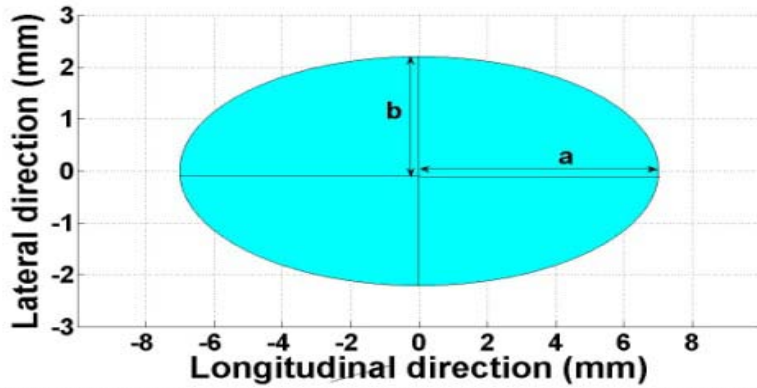

Tangential Contact Problem

- Longitudinal creepage $v_x = \frac{V_1^- - V_1^+}{V}$
- Lateral creepage $v_y = \frac{V_2^- - V_2^+}{V}$
- Spin creepage $v_{spin} = \frac{\Omega_3^- - \Omega_3^+}{V}$

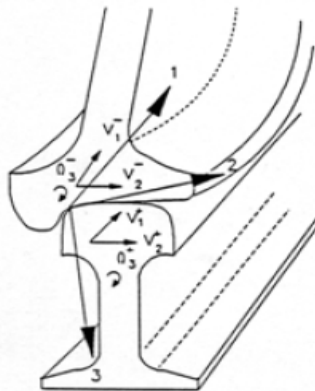

Tangential Contact Problem

Lateral Creepage (Left/right Wheel-rail contact)

$$v_y = \frac{dy}{dt} \left(\frac{1}{v} \right) - \psi$$

Longitudinal Creepage


$$v_{x(left)} = \frac{l_o}{R} + \frac{\lambda y}{R_o} + \frac{l_o}{v} \left(\frac{d\psi}{dt} \right)$$

$$v_{x(right)} = -\frac{l_o}{R} - \frac{\lambda y}{R_o} - \frac{l_o}{v} \left(\frac{d\psi}{dt} \right)$$

Spin Creepage

$$\varphi_{left} = -\frac{1}{v} \frac{d\psi}{dt} + \frac{\lambda}{R_o}$$

$$\varphi_{right} = -\frac{1}{v} \frac{d\psi}{dt} - \frac{\lambda}{R_o}$$

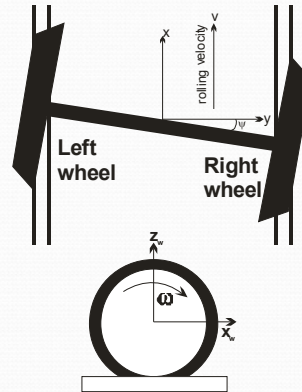

Tangential Contact Problem

Creepages

Kalker's Linear Theory

Calculate Creep Forces

$$\begin{aligned} F_x &= -f_{11}v_x \\ F_y &= -f_{22}v_y - f_{23}v_{spin} \\ M_z &= -f_{23}v_y - f_{33}v_{spin} \end{aligned}$$

Heuristic Non-Linear Model


Calculate Normalized Creep forces

$$\begin{aligned} F_x' &= -aF_x \\ F_y' &= aF_y \\ M_z' &= aM_z \end{aligned}$$


Parameters for experimental test rig

I_z	Moment of inertial	$1.27 \times 10^7 \text{ N-mm}$
K_{py}	Lateral spring stiffness	$3.863 \times 10^3 \text{ N/mm}$
K_{px}	Longitudinal spin stiffness	850 N/mm
C_{py}	Lateral damper coefficient	8 Ns/mm
C_{px}	Longitudinal damper coefficient	100 Ns/mm
f_{11}	Longitudinal linear creep coefficient	$8.06 \times 10^6 \text{ N}$
f_{22}	Lateral linear creep coefficient	$8.09 \times 10^6 \text{ N}$
f_{23}	Lateral/spin linear creep coefficient	$2.2 \times 10^7 \text{ N-mm}$
f_{33}	Spin linear creep coefficient	$1.27 \times 10^7 \text{ N-mm}$
m	Wheelset mass	1250 kg

Dynamic behaviour of the Wheelset on the track using Kalker theory


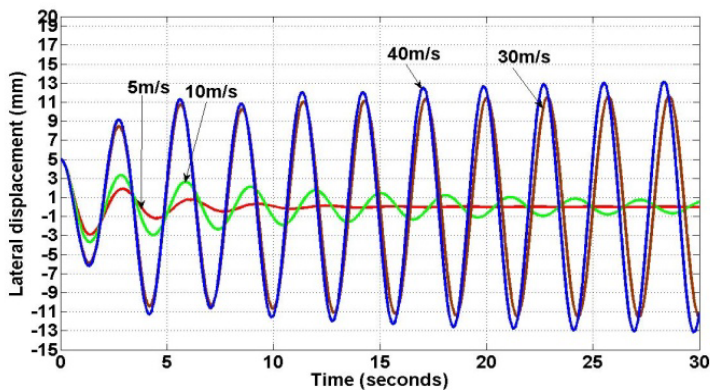


Dynamic behaviour of the Wheelset on the track using Heuristic method

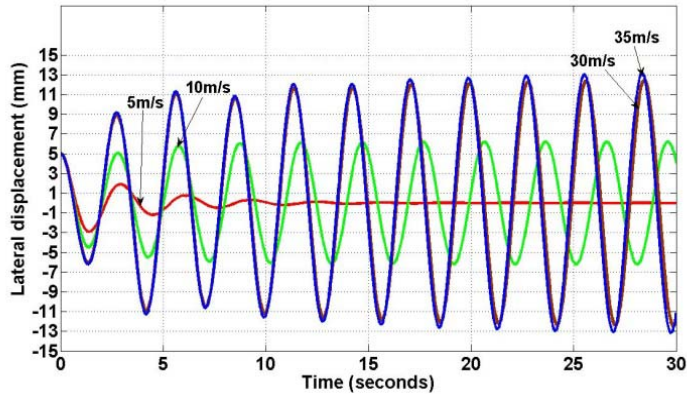

3-DIMENSIONAL WHEEL-RAIL CONTACT MODEL


Diagnostic Engineering Research Centre

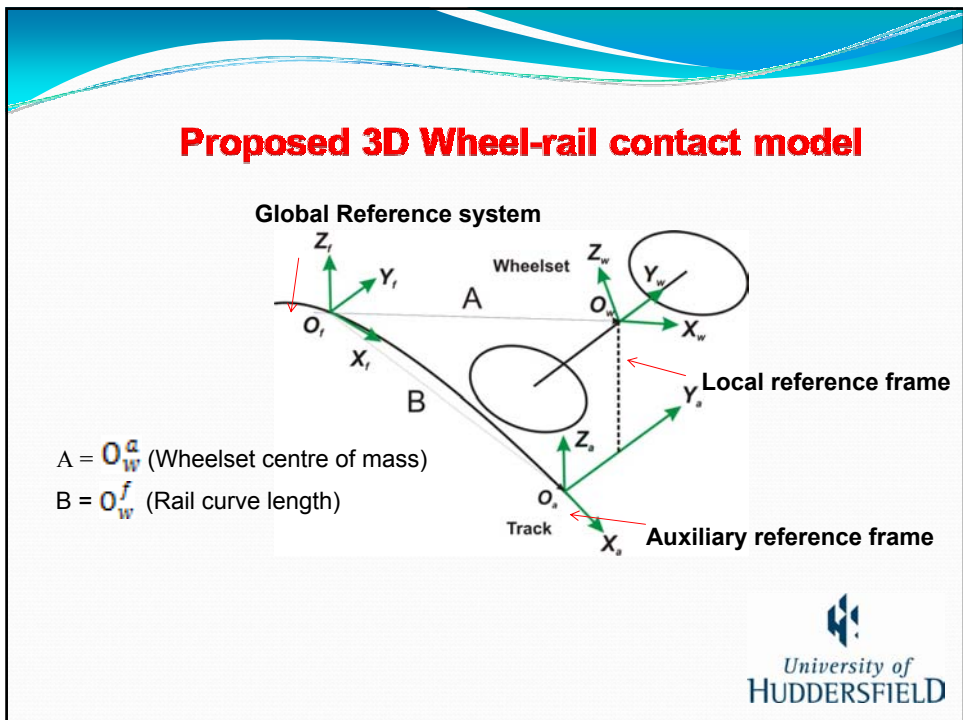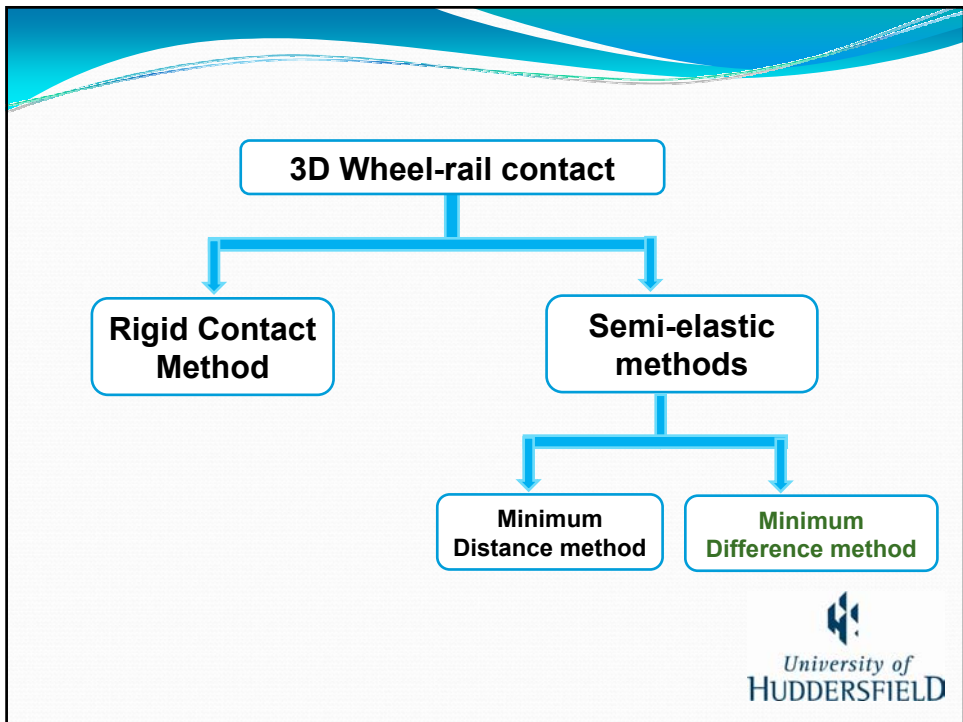

Proposed 3D Wheel-rail contact model


- Global reference system (O_f, X_f, Y_f, Z_f) defines the track as a three dimensional curve.
- The Auxiliary reference system (O_a, X_a, Y_a, Z_a) follows the wheelset during program simulation.
- The local reference system (O_w, X_w, Y_w, Z_w) is defined whereby Y_w is rigidly fixed to the wheelset axle. The origin of the wheelset O_w corresponds with the centre of gravity G of the wheelset.

Proposed 3D Wheel-rail contact model

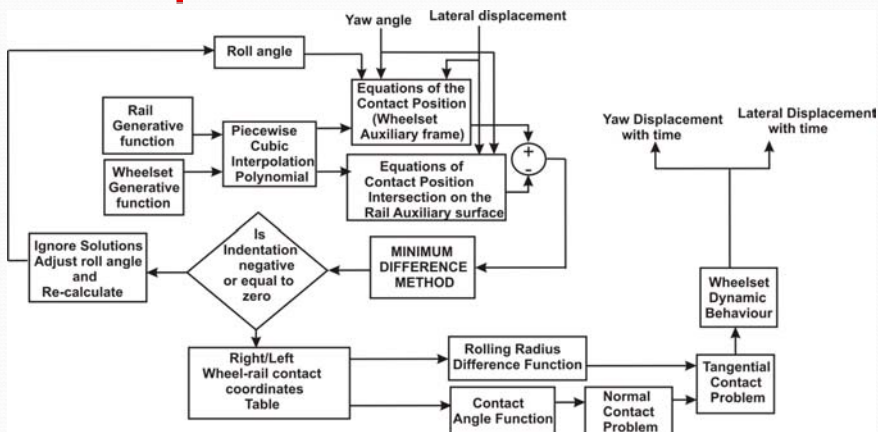


Proposed 3D Wheel-rail contact model


P8 Wheel Profile →

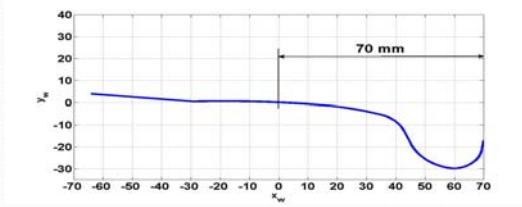

1:20 BS113A Rail cant →

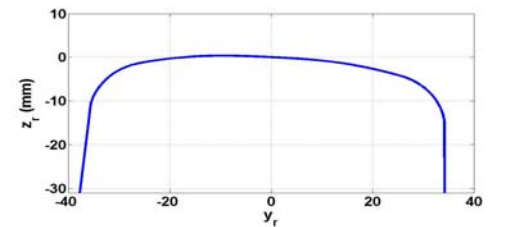


Proposed 3D Wheel-rail contact model

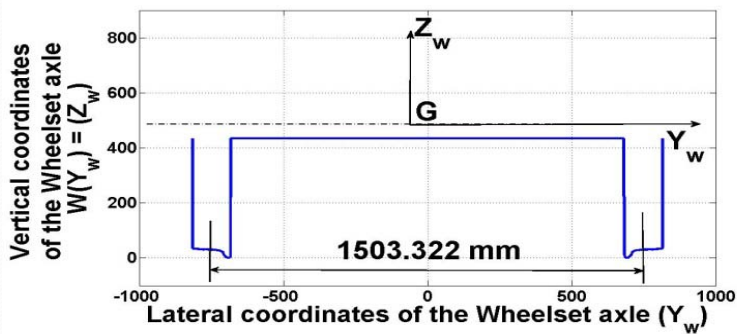

Right wheel lateral contact range
 $(692 \leq Y_w \leq 815) \text{ mm}$

Left wheel lateral contact range
 $(-815 \leq Y_w \leq -692) \text{ mm}$

Proposed 3D Wheel-rail contact model

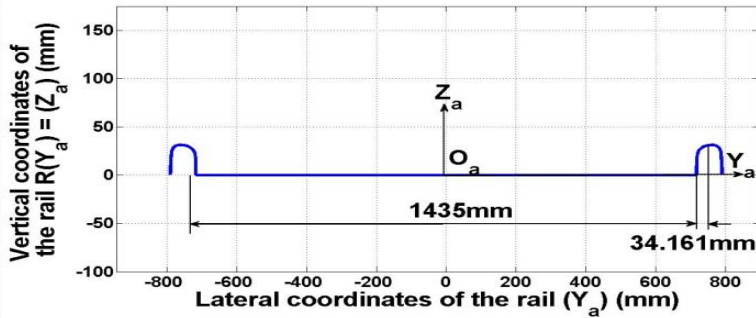


Right wheel lateral contact range

$$(700 \leq Y_a \leq 780) \text{ mm}$$

Left wheel lateral contact range

$$(-780 \leq Y_a \leq -790) \text{ mm}$$

Proposed 3D Wheel-rail contact model

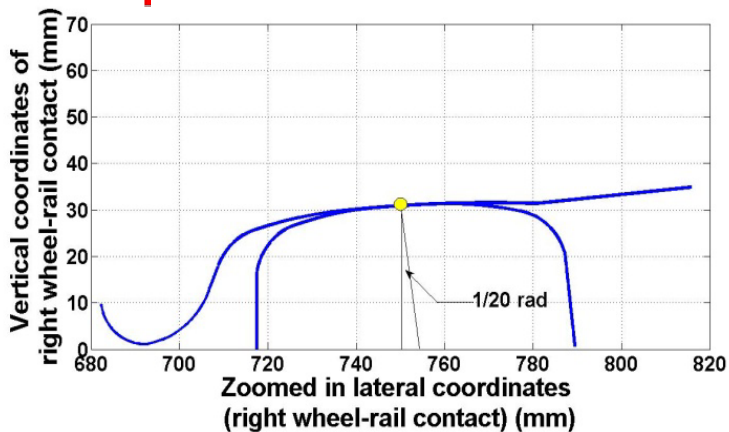

Proposed 3D Wheel-rail contact model

Kinematic equation of the contact point in the Auxiliary system w.r.t the local reference frame

$$V_w^a(X_w, Y_w) = O_w^a + [A_2]V_w^w(X_w, Y_w) = \begin{bmatrix} x_w^a \\ y_w^a \\ z_w^a \end{bmatrix}$$

$$V_w^w(X_w, Y_w) = \begin{bmatrix} X_w \\ Y_w \\ -\sqrt{W(Y_w)^2 - X_w^2} \end{bmatrix} \quad O_w^a = \begin{bmatrix} 0 \\ u_y \\ u_z \end{bmatrix} \quad V_a^a(X_w, Y_w) = \begin{bmatrix} x_w^a \\ y_w^a \\ b(y_w^a) \end{bmatrix}$$

A_2 = Rotation Matrix (link between Local and Auxiliary Reference System)

ψ = yaw angle

ϕ = roll angle

u_y = Lateral displacement

u_z = Vertical displacement

Proposed 3D Wheel-rail contact model


Find the local minimum between the wheel and the rail contact points

$$D(X_w, Y_w) = (V_w^a(X_w, Y_w) - V_a^a(X_w, Y_w)) \cdot C_a$$

$C = V_a^a(X_w, Y_w)$ intersection between the rail surface and line parallel to axis z_r

$$V_a^a(X_w, Y_w) = \begin{bmatrix} x_w^a \\ y_w^a \\ b(y_w^a) \end{bmatrix}$$

$$D = V_w^a(X_w, Y_w)$$

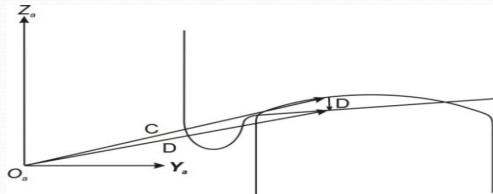

Take partial derivative of D and reduce to one Dimensional form


$$E_{1,2}(Y_w) = \frac{\partial D(X_w, 1, 2)}{\partial Y_w} = 0$$

Check for Indentation

$$I_i = D_i^a \cdot n_a^a(V_{ai}^a) \leq 0$$



Simulated Results

Suspended Wheelset

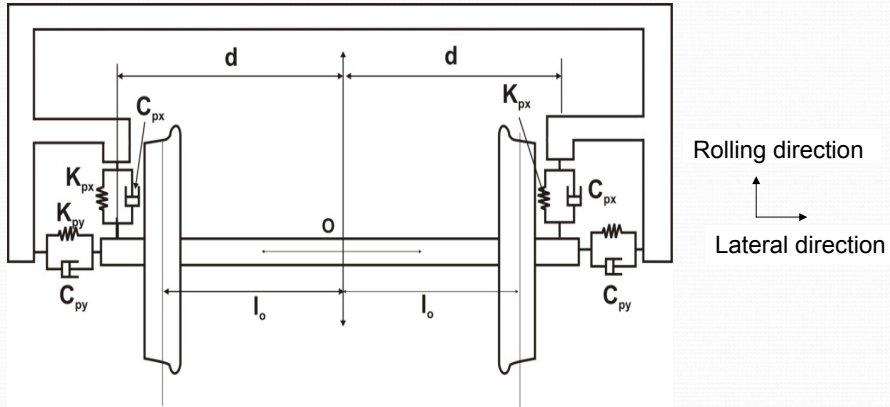


Simulated Results

Input Parameters	Range	Step
roll angle ϕ (rad)	0 – 0.01	0.0005
Yaw angle ψ (rad)	0 – 0.01	0.0005
Lateral displacement _y (mm)	0 – 10mm	0.5

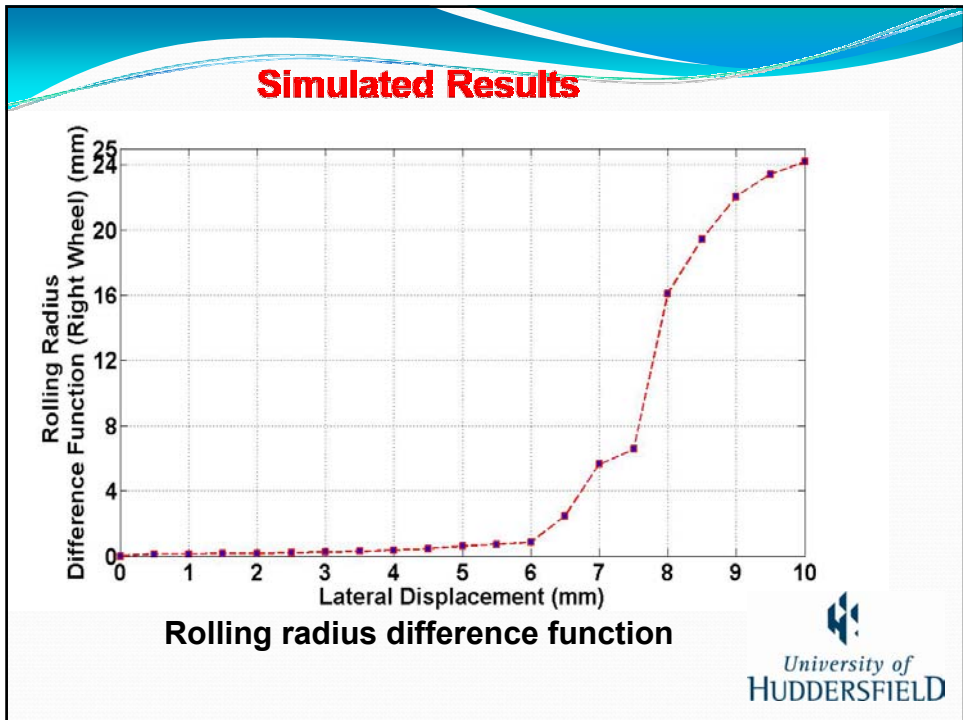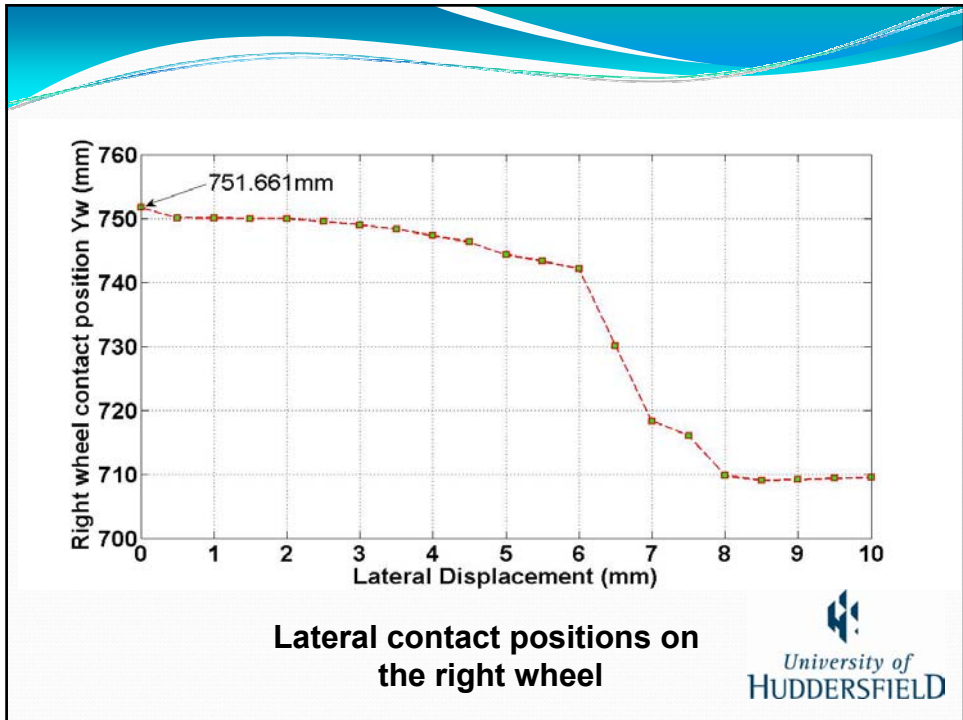


Simulated Results

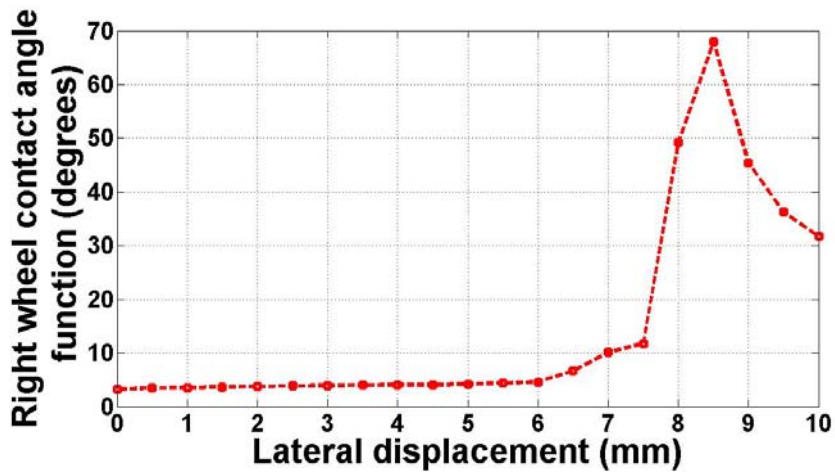


Contact angle function

Simulated Results

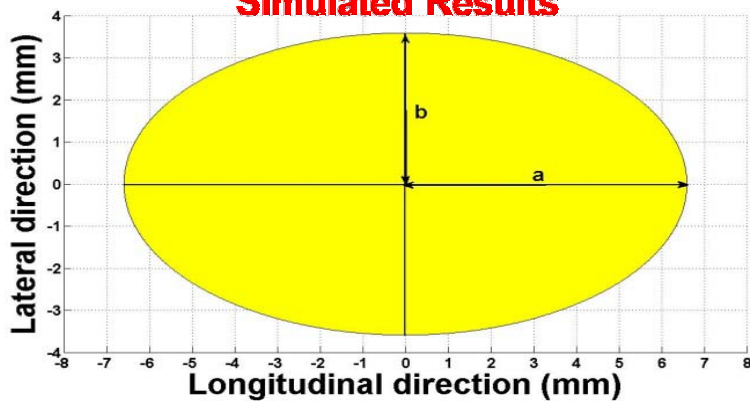


Contact patch the wheel-rail at central position
 $a = 6.6673\text{mm}$, $b = 3.5872\text{mm}$

Simulated Results

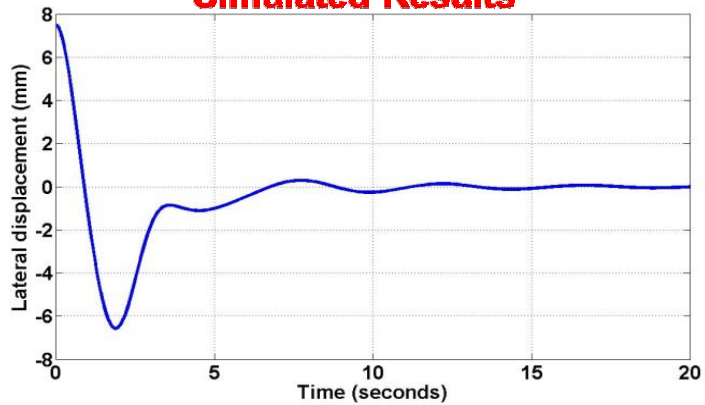


Lateral displacement of the wheelset
Forward velocity ($V = 2.5\text{m/s}$)

Simulated Results

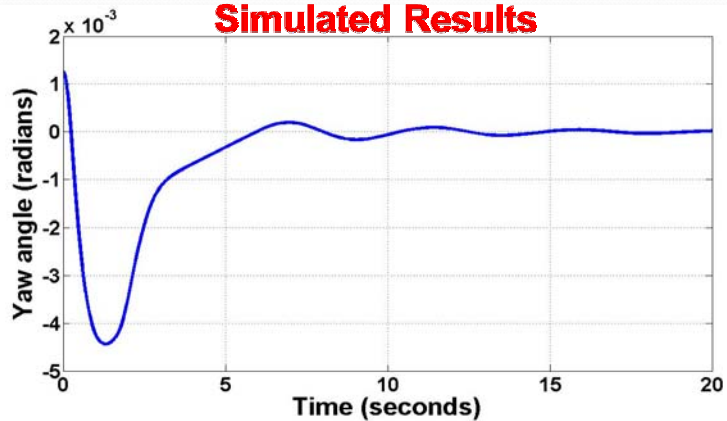

Yaw angle function of the wheelset
Forward velocity ($V = 2.5\text{m/s}$)


Applications

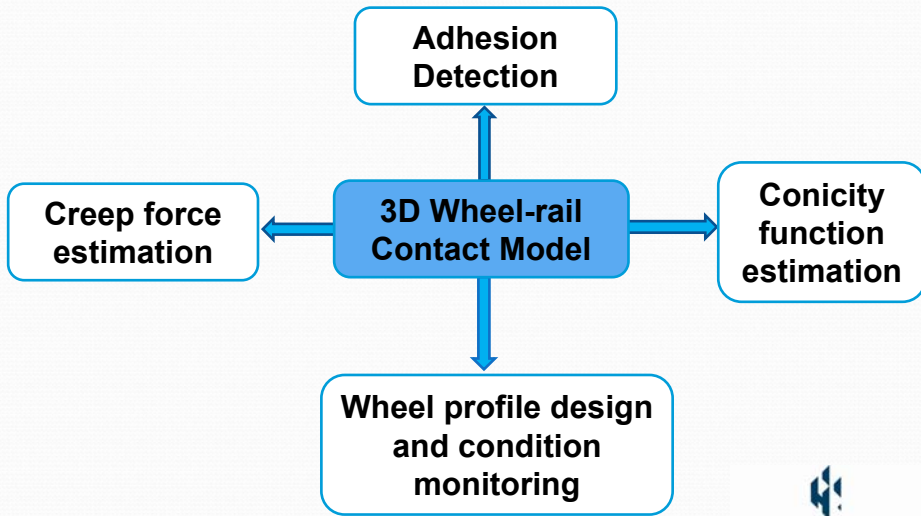

ESTIMATION OF RAILWAY VEHICLE DYNAMIC PARAMETERS

USING MOTOR DRIVE BEHAVIOUR

Diagnostic Engineering Research Centre

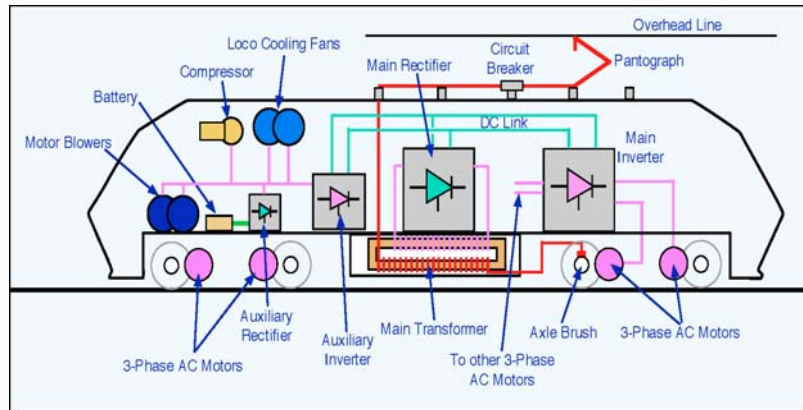

Future contributions

Technologies for accurate measurement and prediction

- **traction and wheel slip/slide control**
- **estimation of vehicle-track dynamics, wear and adhesion**
- **system integration for rail wheelset steering and traction control**

Future contributions

Technologies for accurate measurement and prediction

- **measurement of train ground speed with intelligent data processing**
 - **independent wheel set dynamics**
 - **parameter identification**
- **automated and adaptive model-based prognostics using Monte Carlo simulation, particle filter**

Future contributions

Mechatronic trains of the future

- **remote condition monitoring with wireless intelligent sensors for effective high speed maintenance and inspection of train and track**
 - **moving-load dynamics**

Future contributions

Mechatronic trains of the future

non-linear autonomous systems

- **process monitoring, modelling, control and optimal design**

- **expert systems**

cognitive systems engineering



With acknowledged contributions from

Professor Andrew Ball

Mr Arthur Anyakwo