

Factors affecting Removal of Bacterial Pathogens from Healthcare Surfaces during Dynamic Wiping

1.1 Abstract

Wiping of surfaces contaminated with pathogenic bacteria is a key strategy for combatting transmission of healthcare associated infections. It is essential to understand the extent to which removal of bacteria is modulated by fibre properties, biocidal liquid impregnation and applied hand pressure. The influence of intrinsic and extrinsic factors on the removal efficiencies of pathogenic bacteria was studied. Nonwoven wipes made of either hydrophobic (polypropylene) or hygroscopic (lyocell) fibres were manufactured and dynamic removal efficiency of bacteria studied. The single most important parameter affecting bacterial removal efficiency was impregnation with biocidal liquid ($p < 0.05$). For inherently hygroscopic 100% regenerated cellulose (lyocell) wipes impregnated with biocidal liquid, removal of *E. coli*, *S. aureus* and *E. faecalis* improved by increasing the fabric surface density and wiping pressure to their maximal values - 150 g.m^{-2} and 13.80 kN.m^{-2} respectively. For inherently hydrophobic 100% polypropylene nonwoven wipes, the same conditions maximised the removal efficiency of *S. aureus*, but for *E. coli* and *E. faecalis* a reduction in the wiping pressure to 4.68 kN.m^{-2} was required. Best practice involves the use of higher surface density wipes (150 g m^{-2}) containing regenerated cellulose fibres loaded with liquid biocide, and applied with the greatest possible wiping pressure.

1.2 Introduction

Pathogenic bacteria contaminating critical patient care areas are known contributors to the transmission of healthcare associated infections (HCAI's) (1, 2). HCAI's have been directly linked with more than 37,000 deaths per annum in Europe. Between 20-30% of these infections are thought to be preventable with appropriate control programmes (3). Consequently, the effective removal of pathogens from critical patient care surfaces is crucial (4). Many healthcare providers use nonwoven wipes in combination with a biocidal liquid as part of a disinfection and decontamination regimen for solid surfaces (5, 6). This is an effective strategy, but the underlying interactions governing the removal of bacteria by the nonwoven wipe are poorly understood (7, 8). There are also issues surrounding the discrepancy between realistic wiping time and the exposure time proposed in some standards (9). Removal of bacteria by wiping solid surfaces has been investigated by various groups (10, 11), most notably by Williams *et al.* (5) and Ramm *et al.* (12), as they have developed reproducible methods for analysing bacterial removal by wipes. However, previous studies have typically focused on analysing commercially available wipes, the structure and properties of which are not directly comparable due to differences in the ways they are manufactured. Consequently, understanding the role of wipe design parameters on wiping performance has been challenging.

Nonwoven fabrics are porous assemblies containing fibres arranged mostly in the x-y plane (13). They can be produced from hygroscopic or hydrophobic fibres and fabrics are often impregnated with an aqueous biocidal formulation. The liquid loading is typically 150-350% by weight, with much of the liquid volume being held in the interstitial pore volume between the fibres. For hygroscopic fibres, there will be a large degree of sorption. The basic dimensional properties of a nonwoven fabric include the surface density (g.m^{-2}), the thickness (mm) and porosity (ratio of void volume to total fabric volume). The porosity is an important influence on the total liquid absorptive capacity of the wipe. It has been shown that the mechanical action of wiping with a dry nonwoven fabric is capable of removing some of the bacteria present on a surface (14). Impregnation with an aqueous biocidal formulation substantially improves the removal of particles up to a limit, depending on the absorptive capacity of the fabric (15). Cleaning regimens alone may be ineffective in eliminating pathogens from surfaces (16). Therefore biocides, more specifically, antimicrobials, are used for the control of organisms considered harmful to human health. These pre-impregnated, pre-moistened or "wet" wipes provide higher cleaning-regimen compliance when used by staff and lead to a more rapid cleaning and disinfection process (17). During dynamic wiping, shear and compressive forces are applied, assisting transfer of bacteria to the wipe surfaces and overcoming the adhesive forces between bacteria and the surface on which they reside (18). Changing the wiping pressure can therefore be expected to affect the balance of these forces and the resulting bacterial removal efficacy.

To develop improved biocidal wipe products, there is a need for a controlled investigation into the effect of the wipe surface density, biocide liquid loading and applied pressure during wiping on the disinfection of abiotic plastic surfaces. These factors relate to the basic design attributes of the wipe itself and the wiping action, all of which can be expected to influence the bacterial removal efficiency. Each of these parameters can be controlled

in the laboratory to provide a basis for systematic study. The purpose of this research is to determine the intrinsic (e.g. wipe surface density, lotion addition to wipe) and extrinsic (e.g. wiping pressure) factors leading to the greatest bacterial removal efficiencies. As such, an orthogonal array testing strategy (OATS) was employed (19). An inherently hydrophilic regenerated cellulose fibre (lyocell) and an inherently hydrophobic fibre (PP) were selected as raw materials for wipe fabric manufacture. Surface density values were selected to encompass the range of weights commonly found in nonwoven wipes. Wiping pressures were selected based on those produced by an average sized human hand and the median value reported in the literature (12), while the influence of a biocidal liquid was compared with distilled water and dry controls.

1.3 Materials and Methods

1.3.1 Orthogonal array and parameter selection

An L9 3**3 orthogonal array, generated using the Taguchi method, was used to analyse the optimum wiping conditions for removal of pathogenic bacteria from a poly (methyl methacrylate) model surface. Experimental factors and levels were selected based on preliminary experiments and industrial norms. Fabric surface densities of 50 g.m⁻², 100 g.m⁻², and 150 g.m⁻² were chosen to approximate the range of surface densities found in commercially available nonwoven healthcare surface wipes.

The wipes were tested either in the dry state; after impregnation with dH₂O (control); or impregnation with biocide. Conditions for addition of the water or biocide to the wipe are outlined in section **Error! Reference source not found.** Wiping pressure refers to the pressure applied to the wipe when in contact with the inoculated surface, and excludes any compression of the wipe. Note that a wiping pressure of 0.69 kN.m⁻² is the equivalent of 1 kg of exerted force from an average sized human hand (“hand-weight”) (20). Wiping pressure of 4.68 kN.m⁻² is equivalent to 6.79 kg “hand-weight”. This was selected by extrapolating the 150 g “exerted weight” used by Ramm *et al.* (12) in their wiping experiments. Finally, 13.80 kN.m⁻² wiping pressure is the equivalent of 20 kg “hand-weight” (Table 1).

The process parameter optimised by the array given in Table 2 is bacterial removal %, with the highest removal % value being optimal. The summations use the output values “A1-A9” from Table 1 to calculate the optimum values of fabric surface density, liquid addition and wiping pressure, producing the greatest bacterial removal. B1-B9 are the summations used to calculate the optimum process parameter (OPP). The OPP is the highest of the “B” values for the given parameter. C1-3 are the “difference” values. The largest “C” value indicates the parameter in the array with the greatest effect on bacterial removal %.

Table 1. Orthogonal array parameters arranged in a 3**3 Taguchi array.

Orthogonal array parameters			
Test Run	Area density (g.m ⁻²)	Liquid addition	Wiping pressure (kN.m ⁻²)
A1	50	Dry	0.69
A2	50	Water	4.68
A3	50	Biocide	13.80
A4	100	Dry	4.68
A5	100	Water	13.80
A6	100	Biocide	0.69
A7	150	Dry	13.80
A8	150	Water	0.69
A9	150	Biocide	4.68

Table 2. Optimum process parameter (OPP) calculation scheme and results.

Optimum process parameter calculation			
	For fabric surface density	For liquid addition	For wiping pressure
Σ1	B1 = A1 + A2 + A3	B2 = A1 + A4 + A7	B3 = A1 + A6 + A8
Σ2	B4 = A4 + A5 + A6	B5 = A2 + A5 + A8	B6 = A2 + A4 + A9
Σ3	B7 = A7 + A8 + A9	B8 = A3 + A6 + A9	B9 = A3 + A5 + A7
Optimum Process Parameter (OPP)	Greatest of B1, B4 and B7 (Value of surface density for relevant experiment – from Orthogonal array parameters” in Table 1).	Greatest of B2, B5 and B8 (Value of biocide/dry/water for relevant experiment – from Orthogonal array parameters” in Table 1).	Greatest of B3, B6 and B9 (Value of “exerted weight” for relevant experiment – from “Orthogonal array parameters” in Table 1).
Difference	C1 = (Greatest value of B1, B4, B7) - (Smallest value of B1, B4, B7).	C2 = (Greatest value of B2, B5, B8) - (Smallest value of B2, B5, B8).	C3 = (Greatest value of B3, B6, B9) - (Smallest value of B3, B6, B9).

1.3.2 Wipe manufacture

To ensure full control of wipe substrate properties, fabrics were manufactured in-house using pilot-scale nonwoven manufacturing processes like that used in an industrial context. Polypropylene fibres (T133 HY-Entangle, Fibervisions; Varde, Denmark) of 1.7 dtex linear density, 40 mm fibre length or lyocell fibres (Lenzing; Grimsby, UK - 1.7 dtex, 38 mm fibre length, dull) were pre-opened prior to carding. Parallel-laid webs of 50 g.m⁻², 100 g.m⁻² and 150.g.m⁻² were manufactured using a 0.5 m wide worker-stripper card (Tatham Ltd.; Rochdale,

UK). Wipe fabrics were then produced by hydroentangling the carded webs (Hydrolace) at a specific energy of 4.86 MJ kg^{-1} whilst supported on a woven conveyor. This energy setting was selected as it bonded all three weights of web, without compromising the lower area density in preliminary trials (data not shown). Thicknesses of wipes are given in Table 3.

Table 3. Thickness and surface density of wipes. "S.D." is standard deviation.

	Surface density (g.m^{-2})	Mean thickness (mm)	S.D. (mm)
PP	50	1.27	0.08
	100	1.57	0.13
	150	1.69	0.23
lyocell	50	0.87	0.05
	100	1.14	0.17
	150	1.43	0.17

To ensure removal of any residual fibre finish or auxiliary chemistry, all fabrics were scoured in a Roaches Rotohouse rotary drum dyeing machine (Roaches, UK) for 15 min at 60°C with 1 g.dm^{-3} Hostapal NIN tl k (Clariant Produkte GMBH; Frankfurt, Germany) and 2 g.dm^{-3} sodium carbonate, using a liquor ratio of 20:1 (21). Fabrics were then thoroughly rinsed and line-dried prior to further treatment. Biocide and neutraliser

1.3.3 Biocide, neutraliser and addition to wipe

In the following text, the term “biocide” will be used only to refer to the surfactant-based formulation used in this study. A proprietary biocide was selected consisting of a blend of a non-ionic surfactant (C9-C11 ethoxylated alcohol Pareth-5); a cationic surfactant (Benzalkonium chloride), and various buffering agents and sequestrants. A 1:20 dilution of the biocide stock solution with deionised water (dH_2O) passed the EN 1276 “Quantitative Suspension Test of Bactericidal Activity of Chemical Disinfectants” test, giving a 5 log reduction of the pathogenic bacteria *S. aureus*, *E. coli*, *E. hirae* and *P. aeruginosa* within 5 min (22). The biocide surface tension was $37.5 \times 10^{-3} \text{ N.m}^{-1}$ at 20°C .

The neutraliser component arrested the activity of the biocide. The neutraliser was manufactured according to the methodology outlined by Ramm *et al.* (12). The toxicity of the neutraliser and its ability to quench the activity of the biocide was tested according to the method outlined by Knapp *et al.* (2013) (23).

Where dictated by the orthogonal array, each experimental wipe was soaked in 10 ml 1:20 biocide or dH_2O (control) for 10 min before being run through a Werner Mathis mangle (4 m.min^{-1}) to remove excess liquid as per Berendt *et al.* (11). Liquid pickup was 150% for both the biocide and dH_2O , on all wipe surface densities, using both the PP and the lyocell. This was also the maximum pick-up that could be achieved with the hydrophobic PP wipes.

1.3.4 Measuring the microorganism removal efficiency from a healthcare surface

The microorganisms used in this study were *E. coli* (ATCC 25922), *S. aureus* (ATCC 29213) and *E. faecalis* (ATCC 29212), provided by Leeds Teaching Hospitals NHS Trust Pathology department (LGI; Leeds, UK). Strains were cultured according to previously published methods (14). These were selected as examples of pathogenic bacteria.

Removal of bacteria from a model healthcare solid surface was tested based on methodology reported by Williams *et al.* (5). For brevity, only modifications to this protocol are described. Bacterial cells were suspended in phosphate buffered saline (PBS); the optical density of the solution was measured at $\lambda = 600 \text{ nm}$; and the solution adjusted to McFarland standard 0.5, equivalent to an approximate cell density of $1 \times 10^8 \text{ CFU.ml}^{-1}$ (24); 0.3 g.dm^{-3} bovine serum albumin (BSA) w/v was added to the final solution. Alcohol-sterilised poly (methyl methacrylate) (PMMA) surface tiles (registered to ISO 9001) were inspected to ensure freedom from any defects. The tiles were then inoculated with $20 \mu\text{l}$ of the bacterial solution, and allowed to dry. To simulate dynamic wiping, a 900 mm^2

section of the nonwoven test specimen was attached to a 20 mm diameter boss, and fixed to a Caframo BDC2002 overhead stirrer (Caframo Limited; Ontario, Canada). This was rotated at 60 r min⁻¹ for 10 s at either 0.68 kN.m⁻², 4.69 kN.m⁻² or 13.80 kN.m⁻² applied pressure against the inoculated surface tile, depending on the OATS parameter. Surfaces were then transferred to the neutraliser solution, and shaken at 150 r min⁻¹ for 5 min. Agar was then inoculated, incubated for 24 h at 37 °C, and bacteria removal efficiencies (average % error) calculated using Equation 1.

$$R = (C_{ct} - C_{wt}/C_{ct}) \times 100 \quad \text{Equation 1}$$

Where R = Removal efficiency (%); C_{ct} = Bacterial colonies recovered from the control tile; and C_{wt} = Bacterial colonies recovered from the wiped tile.

The control tile was inoculated with the bacterial solution but was not subject to wiping. All experimentation was carried out at 20°C ±2°C and 65% ±4% relative humidity.

1.3.5 Scanning electron microscopy

Samples were gold coated using a Quorum Q150RS sputter coater Quorum Technologies Ltd.; East Sussex, UK). A JEOL JSM-6610 LV scanning electron microscope (JEOL Ltd.; Tokyo, Japan) was then used to image the nonwoven wipe samples. FIJI image analysis software (25) was used to calculate the fibre presence at the wipe-bacteria-surface interface according to Equation 2 (images not shown). During the coating and imaging, the wipes are subject to negligible pressure, so this should not influence the calculated fibre percentages at the surface. All wipes were imaged at this same pressure, so the results are unbiased.

$$FP_{wsi} = (F_{pixels}/(F_{pixels} + V_{pixels})) \times 100 \quad \text{Equation 2}$$

Where FP_{wsi} = fibre presence at the at the wipe-bacteria-surface interface; F_{pixels} = pixels in image which represent wipe fibres; and V_{pixels} = pixels in image which represent void space. $(F_{pixels} + V_{pixels})$ = total pixels in SEM image.

1.3.6 Statistical analysis

All data resulted from three independent replicates. Where appropriate, one-way analysis of variance (ANOVA) at the 95% confidence interval was performed. All analyses were completed in MINITAB software, version 16 (Minitab Inc.; Pennsylvania, US).

1.4 Results and Discussion

The influence of key wipe parameters on bacterial removal efficiency was studied in relation to each type of bacterium in conditions of dynamic wiping.

The output response variables from the orthogonal array (values A1-A9 in Table 4) were the removal efficiencies of *E. coli*, *S. aureus* or *E. faecalis* from the model surface during simulated dynamic wiping. These values were then used to determine optimum parameters for the wipes, *viz.* surface density, liquid addition and pressure during wiping (“OPP” values in Table 6). Polypropylene and lyocell were chosen for wipe manufacture as both are commonly used in industrial wipe manufacture. Additionally, it gives the opportunity to evaluate an inherently hydrophilic regenerated cellulose fibre (lyocell) and an inherently hydrophobic fibre (PP) in terms of intrinsic and extrinsic factor effects on wiping performance.

Table 4. Bacterial removal efficiency results for the polypropylene and the lyocell wipes for *E. coli*, *S aureus* and *E. faecalis*. Standard deviations are not reported as this is not consistent with the orthogonal array method.

Test Run	PP nonwoven wipe			lyocell nonwoven wipe		
	<i>E. coli</i> removal (%)	<i>S. aureus</i> removal (%)	<i>E. faecalis</i> removal (%)	<i>E. coli</i> removal (%)	<i>S. aureus</i> removal (%)	<i>E. faecalis</i> removal (%)
A1	44.64	36.60	29.17	34.19	36.90	32.10
A2	61.66	59.20	57.82	50.00	42.37	42.38
A3	65.66	72.00	58.61	87.46	74.40	75.21
A4	57.85	43.33	44.69	38.24	36.32	39.74
A5	68.03	63.27	65.88	60.00	69.08	70.94
A6	75.53	68.47	77.42	79.64	80.09	82.22
A7	59.83	51.67	54.64	68.01	69.41	71.16
A8	69.53	68.02	69.49	78.22	79.21	74.24
A9	81.67	<u>73.06</u>	77.78	<u>87.74</u>	<u>82.88</u>	<u>84.35</u>

Testing in Table 3 was conducted according to the orthogonal array (given in Table 1). The bacterial removal % values in row A9 in Bold are the highest removal values for a given bacterium given by the “within array” testing. These match the optimum combination of area density, liquid addition and wiping pressure predicted by the orthogonal array. The underlined bacterial removal % values in row A9 are the highest removal values for a given bacterium given by the “within array” testing. However, they are not the optimum combination of area density, liquid addition and wiping pressure predicted by the orthogonal array.

For PP nonwovens, the predicted optimum process parameters - that is, the wipe manufacture and testing parameters predicted by the orthogonal array to give the highest removal % of bacteria from the surface - for both *E. coli* and *E. faecalis* were 150 g.m⁻² surface density, in combination with the biocide and a pressure of 4.68 kN.m⁻² during wiping. This prediction was confirmed by OATS output values in Table 43, test run A9 – 81.67% removal of *E. coli* and 77.78% removal of *E. faecalis*, the highest removal values found for each bacterial condition during the testing. For the *S. aureus*, 13.8 kN.m⁻² was the predicted optimum pressure parameter. This was confirmed by testing these parameters outside of the array – i.e. using a 150 g.m⁻² PP nonwoven with biocide and 13.8 kN.m⁻² pressure while wiping a surface contaminated with *S. aureus* - gave a mean removal value of 74.4%, higher than any within-array value (3 shows orthogonal array testing results – the highest removal value for within-array testing for removal of *S. aureus* was 71.78 % in test row A9).

For lyocell nonwovens, 150 g.m⁻² surface density in combination with the biocide and 13.8 kN.m⁻² pressure during wiping were the calculated optimum process parameters for all bacteria; these were confirmed by testing these conditions outside the orthogonal array and comparing the results. The mean removal values obtained were 88.74% for *E. coli*, 88.31% for *S. aureus* and 86.52% for *E. faecalis*, all of which were higher than any of the array outputs for the given bacteria (underlined values in Table 4, row A9).

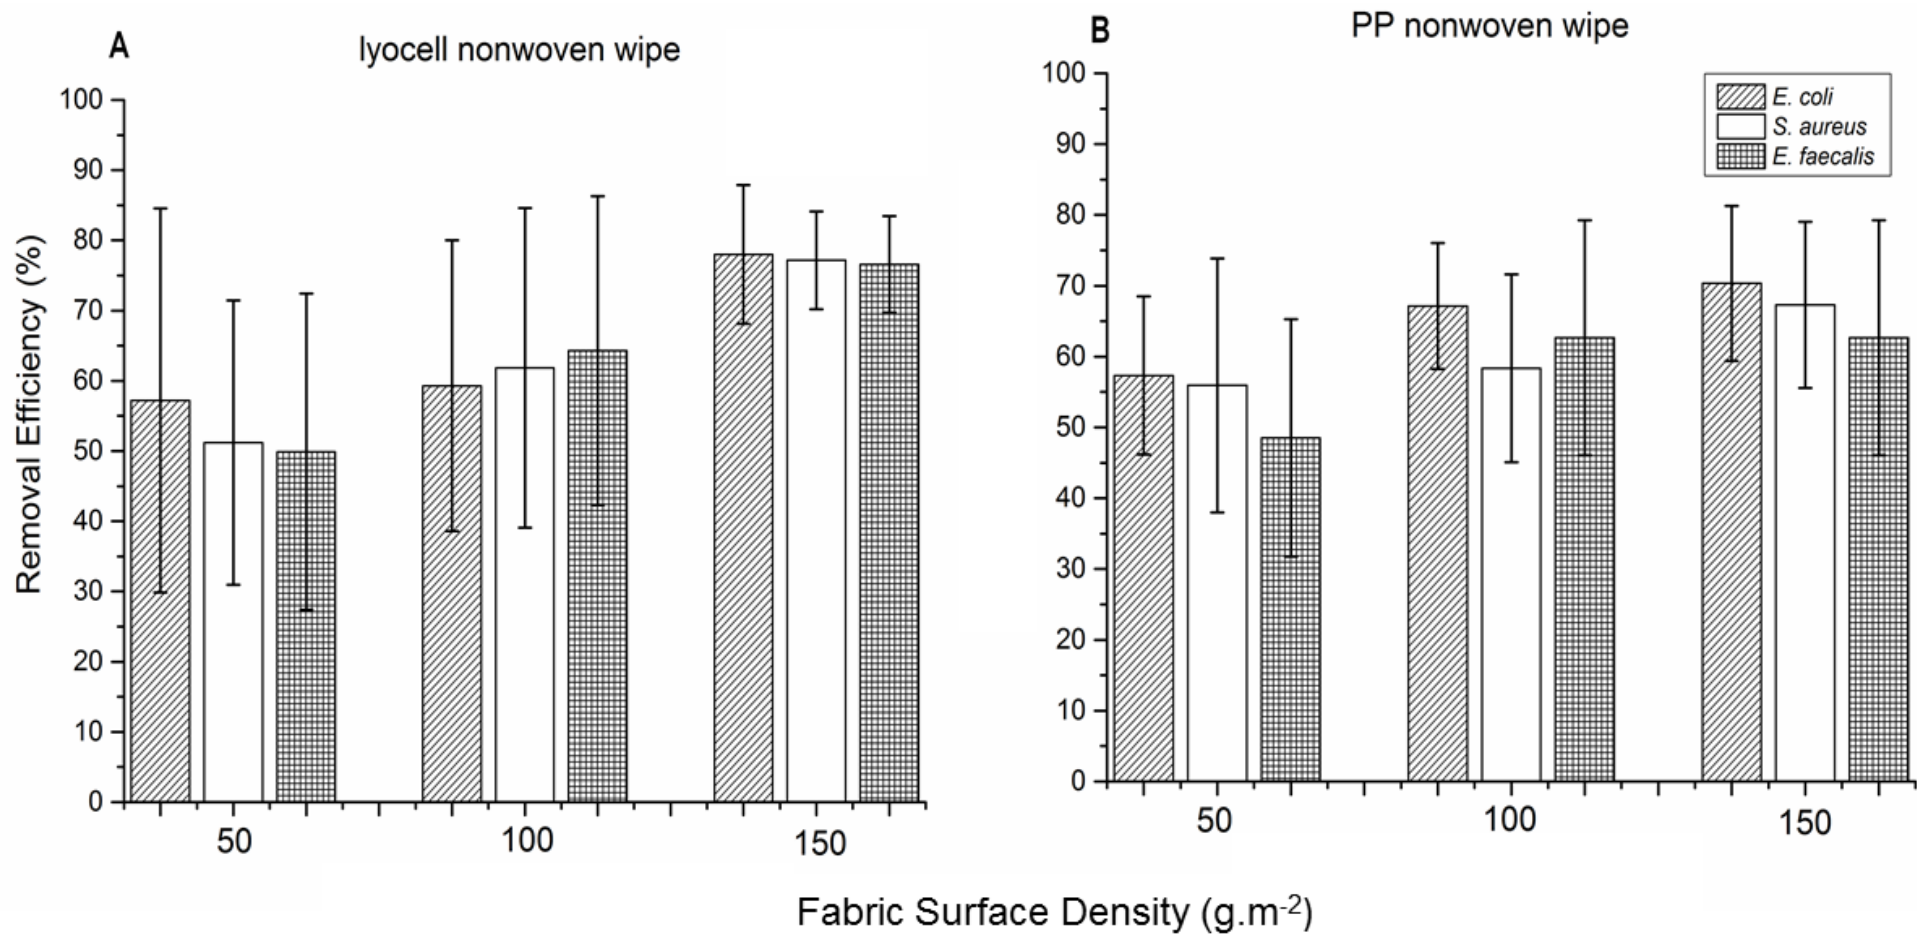


Figure 1. Removal efficiency of wipe vs. fabric surface density, (A) lyocell wipes, and (B) PP wipes. Error bars indicate standard deviation.

The bacterial removal efficiency was considered as a function of fabric surface density for each bacterium and each substrate material (Figure 1), by taking an average of the results from the three surface density values (i.e. from Table 4, results from **A1-A3** for 50 g.m⁻², **A4-A6** for 100 g.m⁻², and **A7-A9** for 150 g.m⁻²).

Although usage of biocide was the most influential parameter in terms of increasing bacterial removal efficiency, the results suggested utilisation of higher surface density would also improve removal efficiency, shown by the trend in increase in removal efficiency with increasing surface density (Figure 1). This can impact dry wiping as well as wet wiping. This is significant as dry wiping has shown to be effective in bacterial removal from surfaces (14). The differences in bacterial removal efficiency between the lowest and highest surface density wipes containing both lyocell and PP for *E. coli*, *S. aureus* and *E. faecalis* were all significant at $p < 0.05$ (unpaired t-test).

There was a persistent trend of increasing bacterial removal efficiency with increasing fabric surface density for all bacteria, in both the PP and lyocell wipes, though the effect was more pronounced with the lyocell wipes, as the gradients of calculated best fit lines are steeper (slope and intercept given in Table 5). Based on the data it was clear that increasing the wipe surface density, irrespective of fibre content, can therefore be expected to improve bacterial removal efficiency. This is because increasing the surface density increases the holding capacity for the biocide which itself is largely aqueous.

Liquid add-on during biocide (or water) addition to the wipe was 150% weight to weight for all wipes, so heavier surface density wipes will have more biocide. Therefore the likelihood of either a bacterial “kill” on the contaminated surface or bacterial removal from the contaminated surface is higher with higher surface density. It has previously been shown that bacteria interact with and adhere directly to the fibres in dry wipes (14). Therefore, if more fibres are present at the wipe-contaminated surface interface, there is a greater likelihood of bacterial adhesion and removal. Heavier surface density wipes were shown to remove more bacteria without liquid addition, following the same trend as with the biocide-containing wipes.

Table 5. Slope and intercept for removal efficiency vs. surface density graph best fit lines from Figure 1.

	Bacteria	Slope	Intercept
PP	<i>E. coli</i>	0.12	50.35
	<i>S. aureus</i>	0.13	45.84
	<i>E. faecalis</i>	0.18	41.35
lyocell	<i>E. coli</i>	0.25	39.86
	<i>S. aureus</i>	0.27	37.12
	<i>E. faecalis</i>	0.26	37.18

In Table 5, values highlighted in bold show the optimum process parameter selection. OPP* denotes a set of optimum process parameters that have been confirmed by testing outside of the orthogonal array. Cells highlighted in Black indicates the largest “C” (“difference”) value -indicating the variable that has most impact on bacterial removal. The parameter with greatest “C” value (Table 5, calculated according to Table 2) is the parameter that has the greatest effect on the removal efficiency. For all bacteria and both wipe types, this was “C2” – the liquid addition. This means that the addition of a biocide to a wipe has the greatest effect on bacterial removal % of any of the parameters investigated. The main effects on removal efficiency were determined by ANOVA. For the PP wipe, liquid addition had the most significant effect on removal of *E. coli* ($p < 0.01$); *S. aureus* and *E. faecalis* (both $p < 0.05$), confirming the differences observed in the OATS. PP surface density also had a significant effect on *E. coli* removal ($p < 0.01$). Similarly, for the lyocell wipe, liquid addition had the most significant effect on removal of *E. coli* ($p < 0.05$); *S. aureus* and *E. faecalis* (both $p < 0.01$), which agreed with the OATS differences. The lyocell surface density and wiping pressure both had a significant effect on the removal of *S. aureus* ($p < 0.05$ and $p < 0.01$ respectively) and *E. faecalis* (both $p < 0.05$). Increase of surface density for either wipe type will also increase dry wiping removal of biocide.

Note that the improvement in wiping efficiency due to the addition of the biocidal liquid might also be partly due to the presence of a liquid phase, and not just the fact that it is a biocidal liquid. The addition of water alone can substantially increase bacteria removal from the surface by providing a transport medium in which bacteria can be suspended and transported the interstitial pore spaces within the wipe fabric structure.

The presence of a biocide liquid in wiping is therefore important to ensure effective removal of bacteria from hard surfaces. Since bacteria are attached to the surface, there will be an energy threshold that must be overcome to remove them. Whilst it is reasonable to assume that increasing wiping pressure will assist in overcoming these forces by providing greater energy to the surface (26) via applied forces such as shear and compression, it is apparent that a high wiping pressure cannot substitute for the presence of a liquid. Initially during wiping, the role of the biocidal liquid relates to its inherent surfactancy and the consequent reduction in surface tension, which improves surface wetting (27). In the present study, the surface tension of the biocide was roughly half of that of water. Consequently, an increase in the removal of bacteria from the surface versus water and dry controls can be anticipated.

The 0.015 g.m⁻² bovine serum albumin simulated organic load present on the PMMA tile causes a decrease in wetting tension of the PMMA surface due to the chemical nature of bovine serum albumin (i.e. protein), the salts also present in the bovine serum albumin will deposit on the PMMA surface, decreasing the wetting tension of the PMMA surface (14).

Also important to consider is the absorption and desorption of biocide to and from the wipes during use. The biocide is an aqueous medium, the bulk of which is absorbed and retained within the void volume of the wipe, depending on the surface energy of the constituent fibres. During use, compression of the wipe structure reduces its volume and a proportion of interstitially retained liquid will therefore be released. This effect was most pronounced in the PP wipe, which is inherently hydrophobic. In the PP wipe, the optimum wiping pressure for *E. coli* and *E. faecalis* was only 4.69 kN.m⁻², compared to 13.80 kN.m⁻² in the lyocell wipes. In the lyocell wipes, a proportion of the aqueous biocide will chemically interact with –OH groups on the fibre surfaces, and be more effectively retained within the fabric restricting its subsequent availability. Therefore, as the biocide is largely aqueous, the concentration of the benzalkonium chloride, the “biocidal” component of the biocide, may be greater outside the lyocell fibre, in the interstitial spaces in the lyocell wipe, as it only has one Hydrogen-bond acceptor and zero Hydrogen-bond donors (28). Therefore, the availability of benzalkonium chloride may be greater in the lyocell wipes, however it lacks the necessary liquid phase to deliver it to the contaminated surface and the bacterial cells on it. This means that although the fraction of liquid impregnated in to each wipe was identical, a greater proportion of the “whole” biocide (i.e. liquid phase, benzalkonium chloride and surfactants) is released from the PP wipe at a low wiping pressure, which assists in the bacterial removal. Thus, increasing the wiping pressure using PP wipes did not result in significantly better removal of *E. coli* and *E. faecalis*. In contrast, greater wiping pressure of 13.80 kN.m⁻² is required using lyocell wipes to release sufficient liquid to provide optimal surface bacterial removal.

Contamination of previously clean surfaces by soiled wipes is known to occur during practical wipe usage. This has previously been studied by Siani *et al.* (29). Interestingly, Siani *et al.* (29) and Ramm *et al.* (12) both suggested that the degree of surfactancy of the biocide will affect any surface recontamination that occurs from an already used, soiled wipe onto a previously sterile surface. The effect of the parameters examined in this study on recontamination of the PMMA surface was not studied in this work. Additionally, only the PMMA tiles were used as model surface, in practical usage wipes will be used on surfaces of different chemistries and topographies. It is suggested that recontamination and the effect of different surface types will form the basis of future experimentation. Discussion of other factors affecting the wiping of surfaces can be found in the work of Maillard and Sattar (9).

During wiping, fibres in the wipe-surface will directly interact with the contaminated surface. It may therefore be postulated that a greater number of fibres will lead to more contact and therefore more removal. As indicated in Table 7, the solid (fibre) volume fraction increased with increasing surface density, such that both the PP and lyocell 150 g.m⁻² webs contain significantly more fibres than the 50 g.m⁻² and 100 g.m⁻² ($p < 0.05$). Accordingly, the heaviest wipes considered in this study, i.e. 150 g.m⁻² consistently yielded greater bacteria removal efficiency than the 50 g.m⁻² and 100 g.m⁻² wipes.

However, increasing the surface density also enables a greater weight of biocide liquid to be reabsorbed, as there is greater excess absorptive capacity in a heavier wipe, even if the liquid loading in terms of weight fraction was consistent for all wipes. In absolute terms, heavier-weight wipes will carry more liquid volume than those of lighter weight. Note that in addition, during wiping, the pressure applied to the substrate is likely to reduce the pore volume as a result of compression, leading to a reduction in effective absorbent capacity. Collectively, this points to heavier weight (>100 g.m⁻²), regenerated cellulosic wipes with biocide being preferentially used in the healthcare environment. As best practice for infection control, this should be combined with use of a high hand wiping pressure, where possible to maximise bacterial removal efficiency. It is interesting to note that the role of hand wiping pressure varies depending on the fibre composition of the wipe substrate. To the author’s knowledge this has not been previously reported. Additionally, it is important to note that in real usage conditions, heat transfer from the user’s hand might potentially influence wiping efficiency.

The benefit of increasing the substrate surface density is also likely to hold true for dry wipes, as it has also been shown in previous work that bacteria will adhere to wipe fibres in the dry state. As reported in these experiments, greater fibre surface area is provided at the interface between the wipe and contaminated surface. As the wipe surface density increases, there will be more surface provided for bacterial adhesion (14).

In future, it may be necessary for the fibre composition of the wipe to be made clearer on the packaging of wipes products so that better guidance can be provided about the hand pressures to be applied. It could be difficult for users to know how much pressure they are actually exerting in real life on the wipe, however the wiping pressure used in this experiment were purposely based on “low”, “medium” and “high” values that correlate with the ‘hand pressures’ already reported in the literature.

Table 6. Optimum process results.

Optimum Process Results					
PP Nonwoven wipe	<i>E. coli</i>		Area density	Liquid addition	Wiping pressure
		Σ1	171.96	162.32	189.70
		Σ2	201.41	199.22	201.18
		Σ3	211.03	222.86	193.52
		OPP	150 g.m ⁻²	With Biocide	4.68 kN.m ⁻²
		Difference	39.07	60.54	7.66
	<i>S. aureus</i>		Area density	Liquid addition	Wiping pressure
		Σ1	167.8	131.60	173.09
		Σ2	175.07	190.49	175.59
		Σ3	192.75	213.53	186.94
		OPP*	150 g.m ⁻²	With Biocide	13.80 kN.m ⁻²
		Difference	24.95	81.93	13.85
	<i>E. faecalis</i>		Area density	Liquid addition	Wiping pressure
		Σ1	145.6	128.50	176.08
		Σ2	187.99	193.19	180.29
		Σ3	201.91	213.81	179.13
		OPP	150 g.m ⁻²	With Biocide	4.68 kN.m ⁻²
		Difference	56.31	85.31	4.21
lyocell nonwoven wipe	<i>E. coli</i>		Area density	Liquid addition	Wiping pressure
		Σ1	168.35	140.43	192.05
		Σ2	177.88	188.22	175.97
		Σ3	233.97	251.54	212.17
		OPP*	150 g m ⁻²	With Biocide	13.80 kN m ⁻²
		Difference	65.62	111.11	36.19
	<i>S. aureus</i>		Area density	Liquid addition	Wiping pressure
		Σ1	153.67	142.64	196.21
		Σ2	185.50	190.66	161.58
		Σ3	231.51	237.37	212.89
		OPP*	150 g.m ⁻²	With Biocide	13.80 kN.m ⁻²
		Difference	77.84	94.73	51.31
	<i>E. faecalis</i>		Area density	Liquid addition	Wiping pressure
		Σ1	149.69	143.01	188.56
		Σ2	192.91	187.56	166.47
		Σ3	229.75	241.78	217.32
		OPP*	150 g.m ⁻²	With Biocide	13.80 kN.m ⁻²
		Difference	80.06	98.78	50.85

Table 7. Relative fibre content at the wipe-surface interface. SEM images of wipe substrates with different surface densities were analysed using FIJI image analysis software (25), then output values were subject to ANOVA with a post hoc Tukey's test ($p < 0.05$). Means that do not share a grouping letter are significantly different from each other. Data are the average of five replicates. S.D. is standard deviation.

	Wipe surface density (g.m ⁻²)	Mean fibre percentage present at wipe: surface interface (%)	S.D.	Grouping
Lyocell	50	70.43	2.11	A
	100	81.81	0.97	B
	150	91.25	1.10	C
PP	50	77.23	4.10	B
	100	79.30	1.85	B
	150	94.25	1.46	C

1.5 Conclusions

Removal of pathogenic bacteria from abiotic surfaces using nonwoven wipes in combination with a biocidal liquid is a stratagem commonly used by healthcare providers. Production of wipes with optimal bacterial removal efficiency is therefore crucial. Using an orthogonal array testing strategy, it was determined that the optimum surface density for both the Lyocell and PP wipes was 150 g.m⁻², i.e. regardless of wipe polymer composition, it was advantageous to use the heaviest substrate. This is substantially higher than the surface density of many surface wipes currently used in healthcare environments, which are more typically in the range 45-100 g.m⁻². Cleaning efficiencies could therefore be improved by specifying wipes of higher surface densities. The addition of biocidal liquid had the most influence on bacterial removal, ($p < 0.05$). This work provides new insight into cleaning, disinfection and decontamination, however greater understanding is needed into the fundamental process underlying bacterial removal from surfaces by nonwoven wipes. The results of this research suggest that best practice for infection control should involve use of heavier weight, regenerated cellulosic wipes impregnated with biocide, with as much wiping pressure as possible.

1.6 Acknowledgements

The authors would like to thank The Clothworkers' Foundation and the Clothworkers' Centre for Textile Materials Innovation for Healthcare for financial support, and Professor Chris Carr for academic support.

1.7 References

1. Russotto V, Cortegiani A, Raineri SM, Giarratano A. Bacterial contamination of inanimate surfaces and equipment in the intensive care unit. *Journal of Intensive Care*. 2015;3:54.
2. Oelberg DG, Joyner SE, Jiang X, Laborde D, Islam MP, Pickering LK. Detection of Pathogen Transmission in Neonatal Nurseries Using DNA Markers as Surrogate Indicators. *Pediatrics*. 2000;105(2):311-5.
3. ECDC. Healthcare-associated infections: ECDC; 2015 [cited 2016 16/03/2016]. Available from: http://ecdc.europa.eu/en/healthtopics/Healthcare-associated_infections/Pages/index.aspx.
4. Datta R, Platt R, Yokoe DS, Huang SS. Environmental cleaning intervention and risk of acquiring multidrug-resistant organisms from prior room occupants. *Archives of Internal Medicine*. 2011;171(6):491-4.
5. Williams GJ, Denyer SP, Hosein IK, Hill DW, Maillard JY. The development of a new three-step protocol to determine the efficacy of disinfectant wipes on surfaces contaminated with *Staphylococcus aureus*. *Journal of Hospital Infection*. 2007;67(4):329-35.
6. Gebel J, Exner M, French G, Chartier Y, Christiansen B, Gemein S, et al. The role of surface disinfection in infection prevention. *GMS hygiene and infection control*. 2013;8(1):Doc10.

7. Katsikogianni M, Missirlis YF. Concise review of mechanisms of bacterial adhesion to biomaterials and of techniques used in estimating bacteria-material interactions. *Eur Cells Mater.* 2004;8(Copyright (C) 2014 American Chemical Society (ACS). All Rights Reserved.):37-57.
8. Lim S-H, Hudson SM. Application of a fiber-reactive chitosan derivative to cotton fabric as an antimicrobial textile finish. *Carbohydrate Polymers.* 2004;56(2):227-34.
9. Sattar SA, Maillard JY. The crucial role of wiping in decontamination of high-touch environmental surfaces: Review of current status and directions for the future. *American Journal of Infection Control.* 2013;41(5):S97-S104.
10. Koo O-K, Martin EM, Story R, Lindsay D, Ricke SC, Crandall PG. Comparison of cleaning fabrics for bacterial removal from food-contact surfaces. *Food Control.* 2013;30(1):292-7.
11. Berendt AE, Turnbull L, Spady D, Rennie R, Forgie SE. Three swipes and you're out: How many swipes are needed to decontaminate plastic with disposable wipes? *American Journal of Infection Control.* 2011;39(5):442-3.
12. Ramm L, Siani H, Wesgate R, Maillard J-Y. Pathogen transfer and high variability in pathogen removal by detergent wipes. *American Journal of Infection Control.* 2015.
13. Russell S. *Handbook of Nonwovens*: CRC Press; 2004. 272 pp. p.
14. Edwards NWM, Best EL, Connell SD, Goswami P, Carr CM, Wilcox MH, et al. Role of surface energy and nano-roughness in the removal efficiency of bacterial contamination by nonwoven wipes from frequently touched surfaces. *Science and Technology of Advanced Materials.* 2017;18(1):197-209.
15. Koh E, Russell SJ, Mao N. Influence of fabric structure on dynamic dirt removal in hydroentangled wipes. *Nonwovens Research Academy (NRA); Chemnitz, Germany: EDANA; 2008.* p. 268-80.
16. French GL, Otter JA, Shannon KP, Adams NMT, Watling D, Parks MJ. Tackling contamination of the hospital environment by methicillin-resistant *Staphylococcus aureus* (MRSA): a comparison between conventional terminal cleaning and hydrogen peroxide vapour decontamination. *Journal of Hospital Infection.* 2004;57(1):31-7.
17. Wiemken TL, Curran DR, Pacholski EB, Kelley RR, Abdelfattah RR, Carrico RM, et al. The value of ready-to-use disinfectant wipes: Compliance, employee time, and costs. *American Journal of Infection Control.* 2014;42(3):329-30.
18. Oathout JM. Determining the dynamic efficiency of cleanroom wipers for removal of liquids and particles from surfaces. *Journal of the Iest.* 1999;42(3):17-26.
19. Zhou C-E, Kan C-w, Yuen C-wM, Matinlinna JP, Tsoi JK-h, Zhang Q. Plasma treatment applied in the pad-dry-cure process for making rechargeable antimicrobial cotton fabric that inhibits *S. Aureus*. *Textile Research Journal.* 2016;86(20):2202-15.
20. TheAverageBody.com. Average Hand Size 2015 [cited 2016 20/10]. Available from: http://www.theaveragebody.com/average_hand_size.php.
21. Goswami P, Blackburn RS, Taylor J, Westland S, White P. Dyeing behaviour of lyocell fabric: effect of fibrillation. *Color Technol.* 2007;123(Copyright (C) 2016 American Chemical Society (ACS). All Rights Reserved.):387-93.
22. Taylor JH, Rogers SJ, Holah JT. A comparison of the bactericidal efficacy of 18 disinfectants used in the food industry against *Escherichia coli* O157:H7 and *Pseudomonas aeruginosa* at 10°C and 20°C. *J Appl Microbiol.* 1999;87(Copyright (C) 2014 American Chemical Society (ACS). All Rights Reserved.):718-25.
23. Knapp L, Rushton L, Stapleton H, Sass A, Stewart S, Amezcua A, et al. The effect of cationic microbicide exposure against *Burkholderia cepacia* complex (Bcc); the use of *Burkholderia lata* strain 383 as a model bacterium. *Journal of Applied Microbiology.* 2013;115(5):1117-26.
24. Zhou C-E, Kan C-w, Yuen C-wM, Matinlinna JP, Tsoi JK-h, Zhang Q. Plasma treatment applied in the pad-dry-cure process for making rechargeable antimicrobial cotton fabric that inhibits *S. Aureus*. *Textile Research Journal.* 2015.
25. Schindelin J, Arganda-Carreras I, Frise E, Kaynig V, Longair M, Pietzsch T, et al. Fiji: an open-source platform for biological-image analysis. *Nat Methods.* 2012;9(7_part1):676-82.
26. Moore G, Griffith C. A laboratory evaluation of the decontamination properties of microfibre cloths. *Journal of Hospital Infection.* 2006;64(4):379-85.
27. Beerse PW, Morgan JM, Baier KG, Cen W, Bakken TA. Antimicrobial wipes which provide improved residual benefit versus gram negative bacteria. *Google Patents; 2001.*
28. N/A. Compound - Benzalkonium Chloride 2012 [22/04/2017]. Available from: <https://www.phenomenex.com/Compound?id=Benzalkonium+chloride-C14>.
29. Siani H, Cooper C, Maillard JY. Efficacy of "sporicidal" wipes against *Clostridium difficile*. *American Journal of Infection Control.* 2011;39(3):212-8.