



University of HUDDERSFIELD

University of Huddersfield Repository

Tran, Van Tung and Yang, Bo-Suk

Data-driven approach to machine condition prognosis using least square regression trees

Original Citation

Tran, Van Tung and Yang, Bo-Suk (2009) Data-driven approach to machine condition prognosis using least square regression trees. *Journal of Mechanical Science and Technology*, 23 (5). pp. 1468-1475. ISSN 1976-3824

This version is available at <http://eprints.hud.ac.uk/id/eprint/16580/>

The University Repository is a digital collection of the research output of the University, available on Open Access. Copyright and Moral Rights for the items on this site are retained by the individual author and/or other copyright owners. Users may access full items free of charge; copies of full text items generally can be reproduced, displayed or performed and given to third parties in any format or medium for personal research or study, educational or not-for-profit purposes without prior permission or charge, provided:

- The authors, title and full bibliographic details is credited in any copy;
- A hyperlink and/or URL is included for the original metadata page; and
- The content is not changed in any way.

For more information, including our policy and submission procedure, please contact the Repository Team at: E.mailbox@hud.ac.uk.

<http://eprints.hud.ac.uk/>

Data-driven approach to machine condition prognosis using least square regression trees

Van Tung Tran, Bo-Suk Yang^{*}

Abstract

Machine fault prognosis techniques have been profoundly considered in the recent time due to their substantial profit for reducing unexpected faults or unscheduled maintenance. With those techniques, the working conditions of components, the trending of fault propagation, and the time-to-failure are precisely forecasted before they reach the failure thresholds. In this work, we propose an approach of Least Square Regression Tree (LSRT), which is an extension of the Classification and Regression Tree (CART), in association with one-step ahead prediction of time-series forecasting techniques to predict the future condition of machine. In this technique, the number of available observations is firstly determined by using Cao's method and LSRT is employed as prediction model in the next step. The proposed approach is evaluated by real data of low methane compressor. Furthermore, a comparison of the predicted results obtained from CART and LSRT are carried out to prove the accuracy. The predicted results show that LSRT offers a potential for machine condition prognosis.

Keywords: Least square method; Embedding dimension; Regression trees; Prognosis; Time-series forecasting

1. Introduction

Most of the components in machine are degraded condition during operation due to wear which is the major reason causing machine breakdown. Maintenance is the set of activities performed on a machine to sustain it on operable condition. The most common maintenance strategy is the corrective maintenance which almost means *fix it when it breaks*. However, this strategy considerably reduces the availability of machine and high unscheduled downtime. Condition-based maintenance (CBM) which involves diagnostic module and prognostic module is an alternative. Prognosis is the ability to predict accurately the future health states and failure modes based on current health assessment and historical trends [1]. There are two main functions of machine prognosis: failure prediction and remaining useful life (RUL) estimation.

Failure prediction, which is addressed in this paper, allows pending failures to be early identified before they come to be more serious failures that result in machine breakdown and repair costs. RUL is the time left for the normal operation of machine before the breakdown occurs or machine condition reaches the critical failure threshold. However, prognosis is a relatively new area and becomes a significant part of CBM [2]. Various approaches in prognosis which range in fidelity from simple historical failure rate models to high-fidelity physics-based models have been developed. Fig. 1 illustrates the hierarchy of potential prognostic approaches related to their applicability and relative accuracy as well as their complexity. Each of them has advantages and limitations in application. For example, experience-based prognosis is the least complex, however, it is only utilized in situations where the prognostic model is not warranted due to low failure occurrence rate; trend-based prognosis may be implemented on the subsystems with slow degradation type faults [3].

Fig. 1 Fidelity of prognostic approaches

In these approaches, data-driven based and model-based are the most considered because they provide higher accuracy and reliability. Nevertheless, model-based techniques require accurate mathematical models of failure modes and are merely applied in some specific components in which each of them needs different model. Furthermore, a suitable mathematical model is also difficult to establish and changes in structural dynamics can affect the mathematical model which is impossible to mimic the behavior of systems. Meanwhile, data-driven techniques utilize and require a large amount of historical data to build a prognostic model. Most of these techniques use artificial intelligence which can generate the flexible and appropriate models for almost failure modes. Consequently, data-driven approaches that some of those have been proposed in references [4-7] are firstly examined.

In order to predict the conditions of machine, the number of future predicting values and the number of observations, so-called embedding dimension d , used for prediction model are two the necessary problems to be considered. In the first issue, one-step ahead or multi-step ahead prediction of time-series forecasting techniques is frequently used. They imply that the prognostic system utilizes available observations to forecast one value or multiple values at the definite future time. Unlike the one-step ahead prediction, multi-step ahead prediction is typically faced with growing uncertainties arising from various sources such as the accumulation of errors and the lack of information. Therefore, the more the steps ahead are, the less reliable the forecasting operation is [7]. In the second issue, the embedding dimension should be chosen large enough so that the prediction model can accurately forecast the future

value and not too large to avoid the unnecessary increase in computational complexity. False nearest neighbor method (FNN) [8] and Cao's method [9] are commonly used to determine this value. However, FNN method not only depends on chosen parameters and the number of available observations but also is sensitive to additional noise. Cao's method overcomes the shortcomings of the FNN approach and therefore, it is chosen in this study.

Classification and regression trees (CART) [10] handle multivariate regression methods to obtain models. These models have proven to be quite interpretable and competitive predictive accuracy. Moreover, these models can be obtained through a computational efficiency that hardly has parallel in competitive approaches, turning these models into a good choice for a large variety of data mining problems where these features play a major role [11]. CART is widely implemented in machine fault diagnosis. In the prediction techniques, CART is also applied to forecast the short-term load of the power system [12] and predict the future conditions of machines [13]. Nevertheless, the average value of samples in each terminal node used as predicted result is the reason for reducing the accuracy of CART. Several approaches have been proposed to ameliorate that CART's limitation [14-16]. In this paper, least square method [17] to improve the prediction capability of CART model is proposed. This improved model is then used to predict the conditions of machine.

2. Background knowledge

2.1. Determine the embedding dimension

Assuming a time-series of x_1, x_2, \dots, x_N . The time delay vector is defined as follows [13]:

$$y_{i(d)} = [x_i, x_{i+\tau}, \dots, x_{i+(d-1)\tau}], \quad i = 1, 2, \dots, N - (d-1)\tau \quad (1)$$

where τ is the time delay and d is the embedding dimension.

Defining the quantity as follows:

$$a(i, d) = \frac{\|y_i(d+1) - y_{n(i,d)}(d+1)\|}{\|y_i(d) - y_{n(i,d)}(d)\|} \quad (2)$$

where $\|\cdot\|$ is the Euclidian distance and is given by the maximum norm, $y_i(d)$ means the i th reconstructed vector and $n(i, d)$ is an integer so that $y_{n(i,d)}(d)$ is the nearest neighbor of $y_i(d)$ in the embedding dimension d .

In order to avoid the problems encountered in FNN method, a new quantity is defined as the mean value of all $a(i, d)$'s:

$$E(d) = \frac{1}{N - d\tau} \sum_{i=1}^{N-d\tau} a(i, d) \quad (3)$$

$E(d)$ is only dependent on the dimension d and the time delay τ . To investigate its variation from d to $d+1$, the parameter E_1 is given by

$$E_1(d) = \frac{E(d+1)}{E(d)} \quad (4)$$

By increasing the value of d , the value $E_1(d)$ is also increased and it stops increasing when the time series comes to a deterministic process. If a plateau is observed for $d \geq d_0$ then $d_0 + 1$ is the minimum embedding dimension.

The Cao's method also introduced another quantity $E_2(d)$ to overcome the problem in practical computations where $E_1(d)$ is slowly increasing or has stopped changing if d is large enough:

$$E_2(d) = \frac{E^*(d+1)}{E^*(d)} \quad (5)$$

where

$$E^*(d) = \frac{1}{N - d\tau} \sum_{i=1}^{N-d\tau} |x_{i+d\tau} - x_{n(i,d)+d\tau}| \quad (6)$$

According to [8], for purely random process, $E_2(d)$ is independent of d and equal to 1 for any of d . However, for deterministic time-series, $E_2(d)$ is related to d . Consequently, there must exist some d 's so that $E_2(d) \neq 1$.

2.2. Least square regression trees (LSRT)

A regression tree models are sometimes called piecewise constant regression models. Regression trees are constructed using a recursive partitioning algorithm. Assuming that a learning set comprised n couples of observation $(y_1, \mathbf{x}_1), \dots, (y_n, \mathbf{x}_n)$, where $\mathbf{x}_i = (x_{1i}, \dots, x_{di})$ is a set of independent variables and $y_i \in \mathcal{R}$ is a response associated with \mathbf{x}_i . The regression tree is constructed by using recursively partitioning process of this learning set into two descendant subsets which are as homogeneous as possible until the terminal nodes are achieved.

The split values for partitioning process are chosen so that the sums of square errors are minimized. The sum of square error of the t th subset is expressed as:

$$R(t) = \frac{1}{n} \sum_{y_i, \mathbf{x}_i \in t} (y_i - \bar{y}(t))^2 \quad (7)$$

where $\bar{y}(t)$ and n are the mean value of response and the number of samples in that subset,

respectively. At each terminal node, the predicted response is estimated by the average $\bar{y}(t)$ of all values y of the response variables associated to that node. This issue is the reason why the prediction accuracy is significantly reduced.

To improve the accuracy of predicted response, the mean value $\bar{y}(t)$ of response at any node in LSRT is replaced by the local model $f(\boldsymbol{\theta}, \mathbf{x}_i)$, which shows the relationship between the response y_i and a set of independent variable \mathbf{x}_i . Hence, the sum of square error of the t th node (subset) in Eq. (7) can be rewritten as:

$$R(t) = \frac{1}{n} \sum_{y_i, \mathbf{x}_i \in t} (y_i - f(\boldsymbol{\theta}, \mathbf{x}_i))^2 \quad (8)$$

where $\boldsymbol{\theta}$ is a set of parameters. The local models $f(\boldsymbol{\theta}, \mathbf{x}_i)$ can be either linear or non-linear model in which the forms are known with unknown values of parameters as shown in Table 1.

Table 1 Local model types in LSRT

In LSRT, those local models are organized as a set of models. At any node, an appropriate model $f(\boldsymbol{\theta}, \mathbf{x}_i)$ is chosen to fit the independent variable \mathbf{x}_i . The values of parameters $\boldsymbol{\theta}$ of each model are initially calculated by using least square method [17]:

$$\boldsymbol{\theta} = [\mathbf{X}^T \mathbf{X}]^{-1} \mathbf{X}^T \mathbf{y} \quad (9)$$

where $\mathbf{y} = [y_1, \dots, y_n]^T$ is the response, $\mathbf{X} = [\mathbf{x}_1^T, \dots, \mathbf{x}_n^T]^T$ is a matrix of independent variables. Furthermore, there could be several appropriate local models that are found, the best model are subsequently chosen based on the minimum of the sum of squares due to error (SSE) and the root mean squared error (RMSE) criterions:

$$\begin{aligned} SSE &= \sum_{i=1}^n (y_i - \hat{y}_i)^2 \\ RMSE &= \sqrt{\frac{1}{n} \sum_{i=1}^n (y_i - \hat{y}_i)^2} \end{aligned} \quad (10)$$

where y_i and \hat{y}_i are response value and predicted value given by local model at that node, respectively. By this improvement, the outputs of terminal nodes are local models that lead to more accurate prediction.

Similarly to CART, LSRT needs to be pruned and carried out cross-validation in order to avoid the over-fitting and complicated problems. These processes are implemented as in references [13].

3. Proposed system

Normally, when a fault occurs in a machine, the conditions of machine can be identified by the change in vibration amplitude. In order to predict the future state based on available

vibration data, the proposed system as shown in Fig. 2 is proposed. This system consists of four procedures sequentially: data acquisition, data splitting, training-validating model and predicting. The role of each procedure is explained as follows:

Fig. 2 Proposed system for machine fault prognosis

Step 1 Data acquisition: acquiring vibration signal during the running process of the machine until faults occur.

Step 2 Data splitting: the trending data is split into two parts: training data for building the model and testing data for testing the validated model.

Step 3 Training-validating: determining the embedding dimension based on Cao's method, building the model and validating the model for measuring the performance capability.

Step 4 Predicting: one-step-ahead prediction is used to forecast the future value. The predicted result is measured by the error between predicted value and actual value in the testing data. If the prediction is successful, the result obtained from this procedure is the prognosis system.

4. Experiments and results

The proposed method is applied to real system to predict the trending data of a low methane compressor of a petrochemical plant. This compressor shown in Fig. 3 and is driven by a 440 kW motor, 6600 volt, 2 poles and operating at a speed of 3565 rpm. Other information of the system is summarized in Table 2.

Fig. 3 Low methane compressor

Table 2 Description of system

The condition monitoring system of this compressor consists of two types, namely off-line and on-line. In the off-line system, accelerometers were installed along axial, vertical, and horizontal directions at various locations of drive-end motor, non drive-end motor, male rotor compressor and suction part of compressor. In the on-line system, accelerometers were located at the same positions as in the off-line system but only in the horizontal direction.

The trending data was recorded from August 2005 to November 2005 which included peak acceleration and envelope acceleration data. The average recording duration was 6 hours during the data acquisition process. Each data record consisted of approximately 1200 data points as shown in Figures 4 and 5, and contained information of machine history with respect to time sequence (vibration amplitude). Consequently, it can be classified as time-series data.

Fig. 4 The entire of peak acceleration data of low methane compressor

Fig. 5 The entire of envelope acceleration data of low methane compressor

These figures show that the machine was in normal condition during the first 300 points of the time sequence. After that time, the condition of the machine suddenly changed. This indicates possible faults occurring in the machine. By disassembling and inspecting, these faults were identified as the damage of main bearings of the compressor (notation Thrust: 7321 BDB) due to insufficient lubrication. Consequently, the surfaces of these bearings were overheated and delaminated [13].

With the aim of forecasting the change of machine condition, the first 300 points are used to train the system. Before being used to generate the prediction models, the time delay and the embedding dimension are initially determined. The time delay is chosen as 1 for the reason that one step-ahead is implemented in all datasets, whilst the embedding dimension is calculated according to the method mentioned in section 2.1. Theoretically, the minimum embedding dimension is chosen as $E_1(d)$ obtains a plateau. In Fig.6, the embedding dimension is chosen as 6 for the reason that the values of $E_1(d)$ reaches its saturation.

Fig. 6 The values of E_1 and E_2 of peak acceleration data of low methane compressor

Subsequent to determining the time delay and embedding dimension, the process of generating the prediction model is carried out. It is noted that during the process of building the prediction model (regression tree model), the number of response values for each terminal node in tree growing process is 5 and the number of cross-validations is chosen as 10 to select the best tree in tree pruning. Furthermore, in order to evaluate the predicting performance, the RMSE value given in Eq. (10) is utilized. Fig. 7 depicts the training and validating results of LSRT for peak acceleration data. The actual values and predicted values are almost identical with very small RMSE of 0.00118. It indicates that the learning capability of LSRT model is tremendously positive.

Fig. 7 Training and validating results of peak acceleration data

The prediction models obtained from training process are evaluated by using an independent data set. This data set begins at the end point used for training set (from the 300th point) and contains the changing machine condition. Fig. 8 shows the actual-like predicted results of LSRT

for peak acceleration data with the small RMSE error of 0.049. Moreover, it can closely track with the changes of the operating condition of machine that is impossible to be obtain with CART as shown in Fig. 9. This is of crucial importance in industrial application for pending failures of equipments.

Fig. 8 Predicted results of peak acceleration data using LSRT

Fig. 9 Predicted results of peak acceleration data using CART

Table 3 shows the remaining results of applying LSRT on envelop acceleration data. It is also depicts the comparison of the RSME between CART and LSRT. According to Table 3, training results of CART are sometimes slightly smaller than those of LSRT but the testing results of CART are always larger. This indicates the superiority of LSRT in aspect of machine condition prognosis.

Table 3 The RMSE of CART and LSRT

5. Conclusions

Machine condition prognosis is extremely significant in foretelling the degradation of working condition and trends of fault propagation before they reach the alarm. In this study, the machine prognosis system based on one-step-ahead of time-series techniques and least square regression trees has been investigated. The proposed method is validated by predicting future state conditions of a low methane compressor wherein the peak acceleration and envelope acceleration have been examined. The predicted results of the LSRT are also compared with those of traditional CART. From the predicted results, the LSRT model performance is vastly superior to the traditional model, especially in testing process. Additionally, the predicted results of LSRT are capable of tracking the change of machines' operating conditions with high accuracy. The tracking-change capability of operating conditions is of crucial importance in pending failures of industrial equipments. The results confirm that the proposed method offers a potential for machine condition prognosis with one-step-ahead prediction.

References

- [1]. Byington, C.S., Watson, M., Roemer, M.J., Galic, T.R, McGroarty, J.J. (2003). Prognostic enhancements to gas turbine diagnostic systems, *Proceeding of IEEE Aerospace Conference*, 7 (2003) 3247–3255.

- [2]. J. Luo, M. Namburu, K. Pattipati, L. Qiao, M. Kawamoto and S. Chigusa, Model-based prognostic techniques, *Proceedings of IEEE Systems Readiness Technology Conference*, (2003) 330-340.
- [3]. M. J. Roemer, C. S. Byington, G. J. Kacprzynski and G. Vachtsevanos, An overview of selected prognostic technologies with application to engine health management, *Proceedings of ASME GT2006-90677*, (2006).
- [4]. G. Vachtsevanos and P. Wang, Fault prognosis using dynamic wavelet neural networks, *Proceedings of IEEE Systems Readiness Technology Conference*, (2001) 857-870.
- [5]. R. Huang, L. Xi, X. Li, C. R. Liu, H. Qiu and J. Lee, Residual life prediction for ball bearings based on self-organizing map and back propagation neural network methods, *Mechanical Systems and Signal Processing*, 21 (2007) 193–207.
- [6]. W.Q. Wang, M.F. Golnaraghi and F. Ismail, Prognosis of machine health condition using neuro-fuzzy system, *Mechanical System and Signal Processing*, 18 (2004) 813-831.
- [7]. W. Wang, An adaptive predictor for dynamic system forecasting, *Mechanical Systems and Signal Processing*, 21 (2007) 809–823.
- [8]. M.B. Kennel, R. Brown and H.D.I. Abarbanel, Determining embedding dimension for phase-space reconstruction using a geometrical construction, *Physical Review A*, 45 (1992) 3403–3411.
- [9]. L. Cao, Practical method for determining the minimum embedding dimension of a scalar time series, *Physica D*, 110 (1997) 43–50.
- [10]. L. Breiman, J.H. Friedman, R.A. Olshen and C.J. Stone, Classification and regression trees, Chapman & Hall (1984).
- [11]. L. Torgo, A study on end-cut preference in least squares regression trees, University of Porto, <http://www.liacc.up.pt/~ltorgo> (2008).
- [12]. J. Yang and J. Stenzel, Short-term load forecasting with increment regression tree, *Electric Power Systems Research*, 76 (2006) 880-888.
- [13]. V.T. Tran, B.S. Yang, M.S. Oh and A.C.C. Tan, Machine condition prognosis based on regression trees and one-step-ahead prediction, *Mechanical Systems and Signal Processing*, 22 (2008) 1179-1193.
- [14]. A. Suárez and J.F. Lutsko, Globally optimal fuzzy decision trees for classification and regression, *IEEE Trans. on Pattern Analysis and Machine Intelligence*, 21 (1999) 1297-1311.
- [15]. C. Huang and J.R.G. Townshend, A stepwise regression tree for nonlinear approximation: application to estimating subpixel land cover, *International Journal of Remote Sensing*, 24 (2003) 75-90.
- [16]. D.S. Vogel, O. Asparouhov and T. Scheffer, Scalable look-ahead linear regression trees, *Proceedings of the 13th International Conference on Knowledge Discovery and Data Mining* (2007) 757-764.
- [17]. R. Johansson, System modeling and identification, Prentice-Hall International, Inc., (1993).

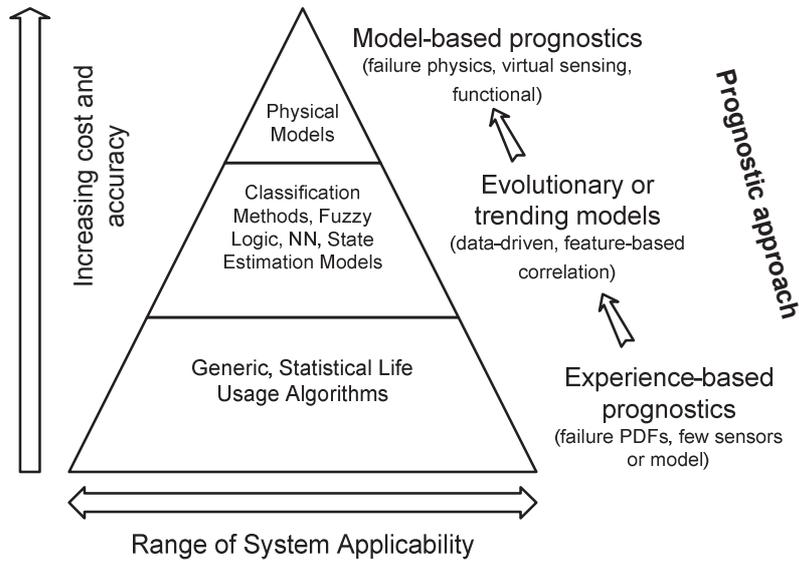


Fig. 1 Fidelity of prognostic approaches

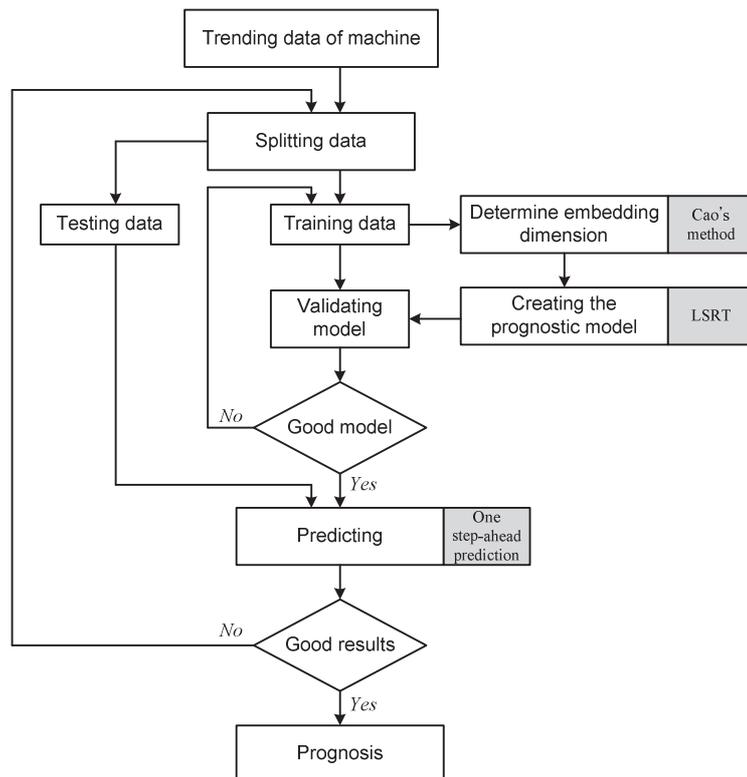


Fig. 2 Proposed system for machine fault prognosis

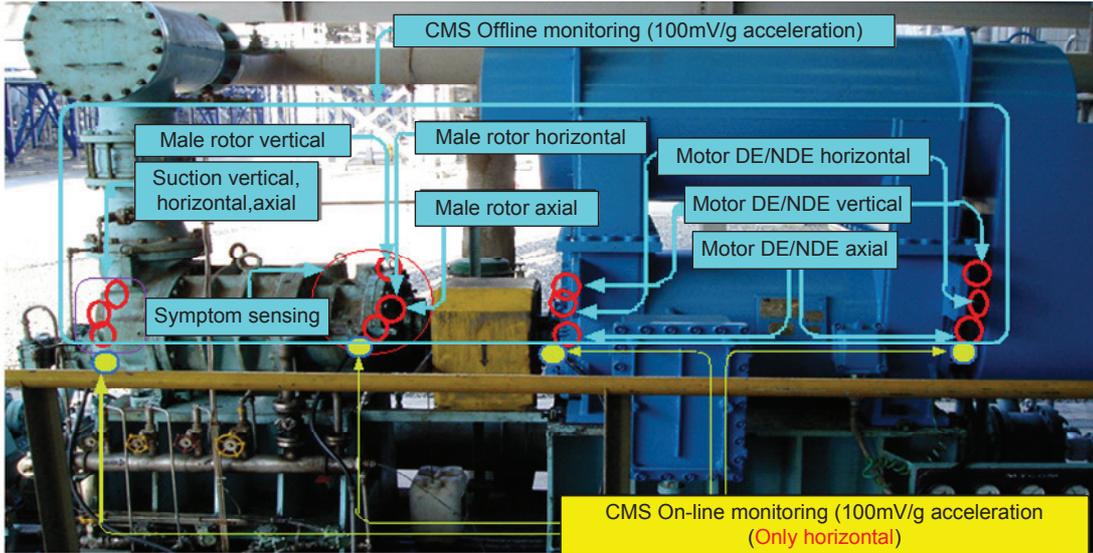


Fig. 3 Low methane compressor

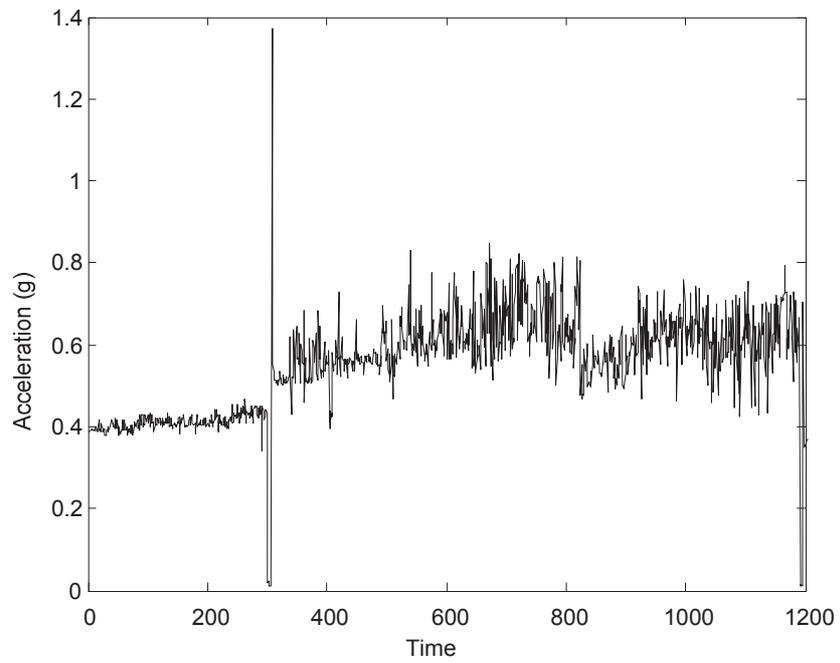


Fig. 4 The entire peak acceleration data of low methane compressor

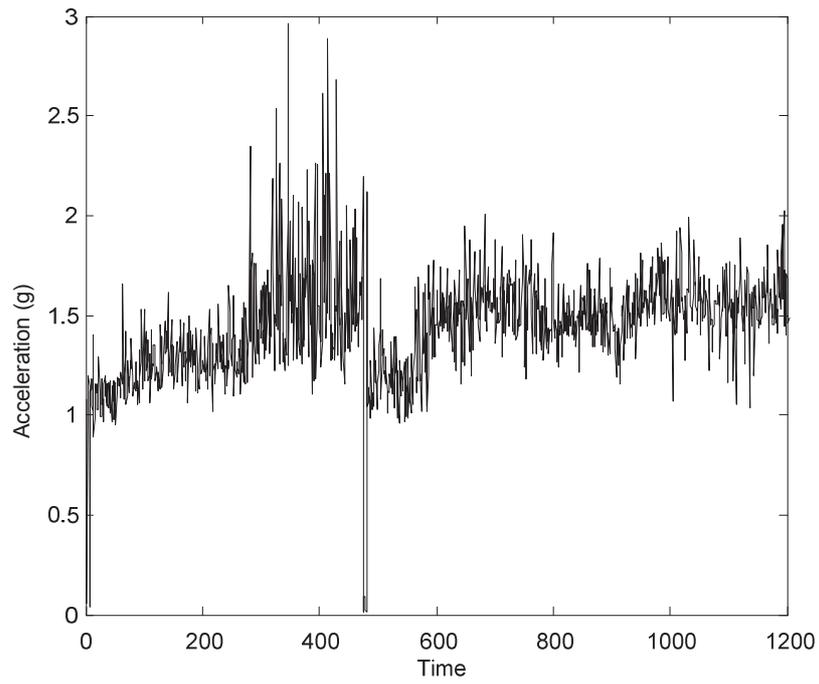


Fig. 5 The entire envelope acceleration data of low methane compressor

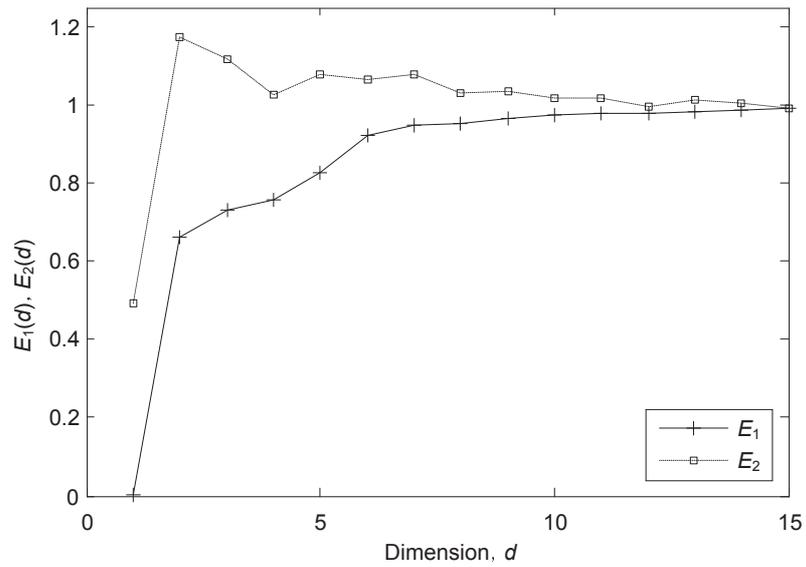


Fig. 6 The values of E_1 and E_2 of peak acceleration data of low methane compressor.

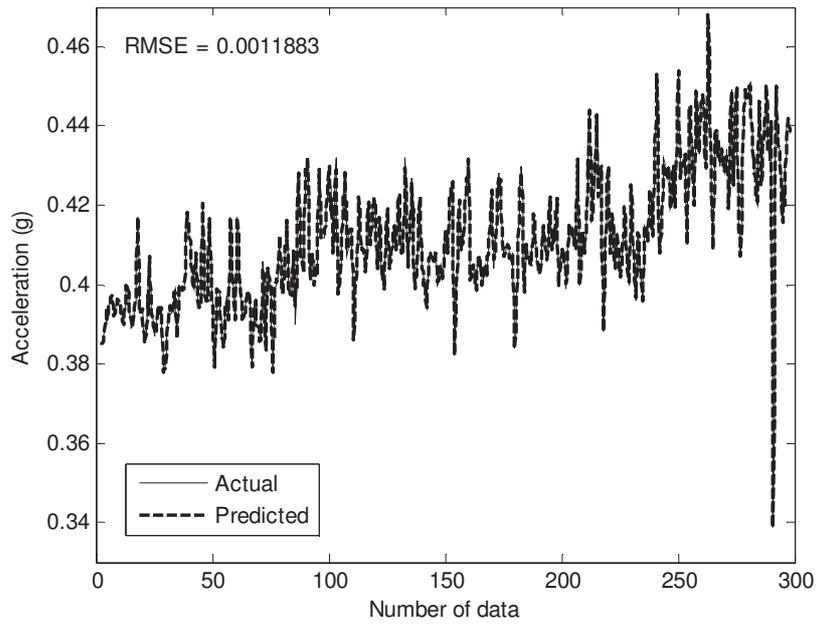


Fig. 7 Training and validating results of peak acceleration data.

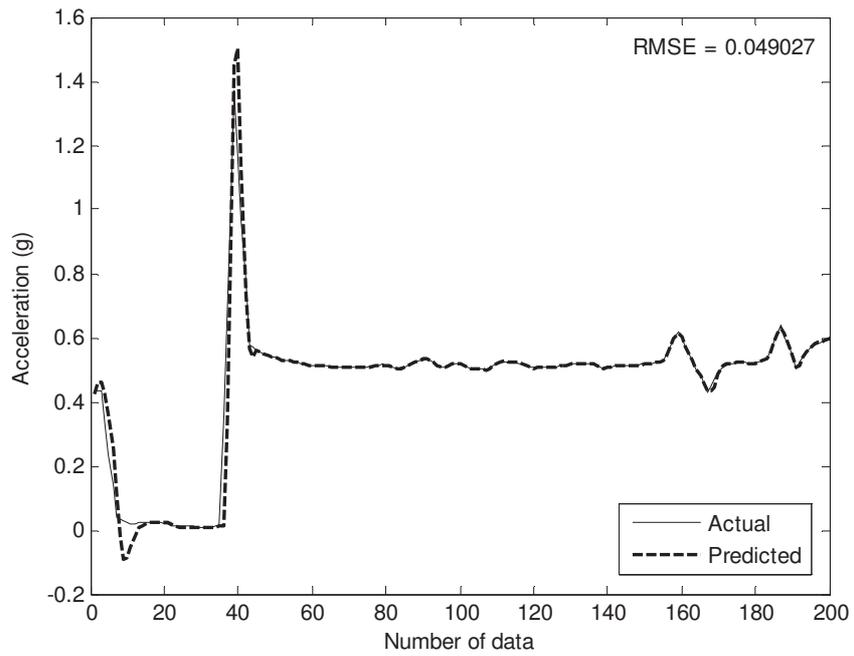


Fig. 8 Predicted results of peak acceleration data using LSRT.

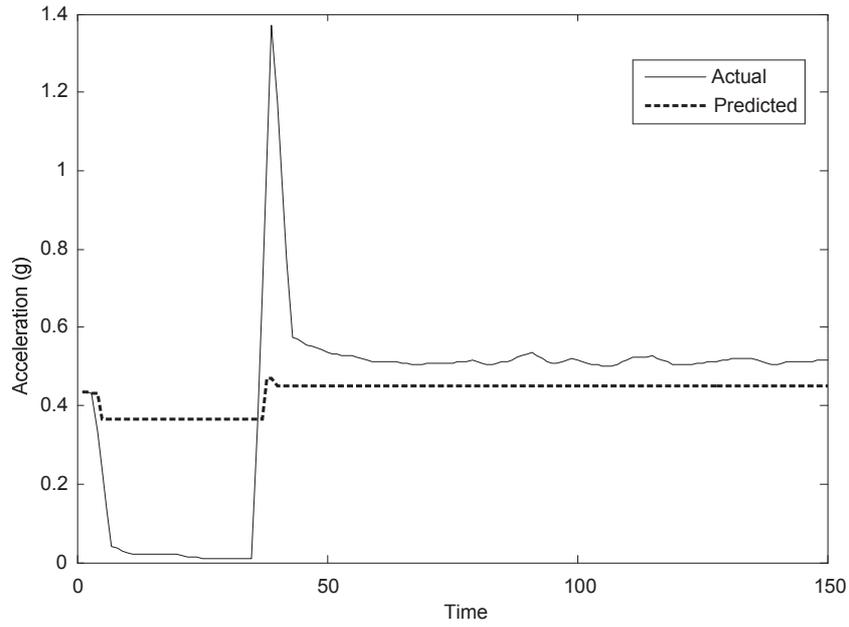


Fig. 9 Predicted results of peak acceleration data using CART.

Table 1 Local model types in LSRT

Model type	Description	Parameters
Polynomial	$y = \sum_{i=1}^{n+1} \theta_i x^{n+1-i}$	θ_i
Power	$y = \theta_1 x^{\theta_2}$ $y = \theta_1 + \theta_2 x^{\theta_3}$	$\theta_1, \theta_2, \theta_3$
Fourier	$y = \theta_0 + \sum_{i=1}^n \theta_{1_i} \cos(n\omega x)$ $+ \sum_{i=1}^n \theta_{2_i} \sin(n\omega x)$	$\theta_0, \theta_{1_i}, \theta_{2_i}$
Sine	$y = \sum_{i=1}^n \theta_{1_i} \sin(\theta_{2_i} x + \theta_{3_i})$	$\theta_{1_i}, \theta_{2_i}, \theta_{3_i}$

Table 1 Description of system

Electric motor		Compressor	
Voltage	6600 V	Type	Wet screw
Power	440 kW	Lobe	Male rotor (4 lobes)
Pole	2 Pole		Female rotor (6 lobes)
Bearing	NDE:#6216, DE:#6216	Thrust:	7321 BDB
RPM	3565 rpm	Bearing	Radial: Sleeve type

Table 3 The RMSE of CART and LSRT

Data type	Training		Testing	
	CART	LSRT	CART	LSRT
Peak acceleration	0.00062	0.0011	0.1855	0.049
Envelop acceleration	0.00028	0.00015	0.1429	0.101