University of Huddersfield Repository

Borisov, Oleg, Fletcher, Simon, Longstaff, Andrew P. and Myers, Alan

Efficient Machine Error Measurement

Original Citation

Borisov, Oleg, Fletcher, Simon, Longstaff, Andrew P. and Myers, Alan (2010) Efficient Machine Error Measurement. In: Future Technologies in Computing and Engineering: Proceedings of Computing and Engineering Annual Researchers' Conference 2010: CEARC'10. University of Huddersfield, Huddersfield. ISBN 9781862180932

This version is available at https://eprints.hud.ac.uk/id/eprint/9350/

The University Repository is a digital collection of the research output of the University, available on Open Access. Copyright and Moral Rights for the items on this site are retained by the individual author and/or other copyright owners. Users may access full items free of charge; copies of full text items generally can be reproduced, displayed or performed and given to third parties in any format or medium for personal research or study, educational or not-for-profit purposes without prior permission or charge, provided:

- The authors, title and full bibliographic details is credited in any copy;
- A hyperlink and/or URL is included for the original metadata page; and
- The content is not changed in any way.

For more information, including our policy and submission procedure, please contact the Repository Team at: E.mailbox@hud.ac.uk.

http://eprints.hud.ac.uk/

- COMPUTING & ENGINEERING -

EFFICIENT MACHINE ERROR MEASUREMENT

University of HUDDERSFIELD

Oleg Borisov, PhD Student | Supervisors: S. Fletcher, A. Longstaff, A. Myers

CPT

Introduction

Machine tool (MT) capability & availability are of paramount importance in modern manufacturing industry. The first is determined by measurement, the second depends on maintenance & calibration which includes measurement procedures.

Increasing measurement efficiency leads to:

1. More accurate & repeatable results
2. Machine downtime decrease
3. Uncertainty estimation

Novelty

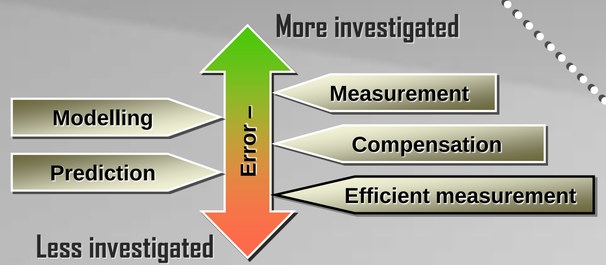

Methodology

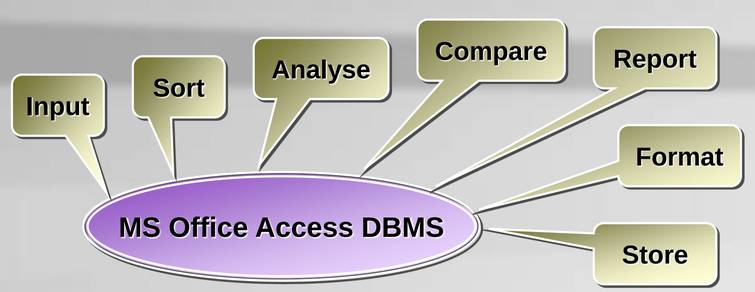

DBMS – Database Management System

Data management

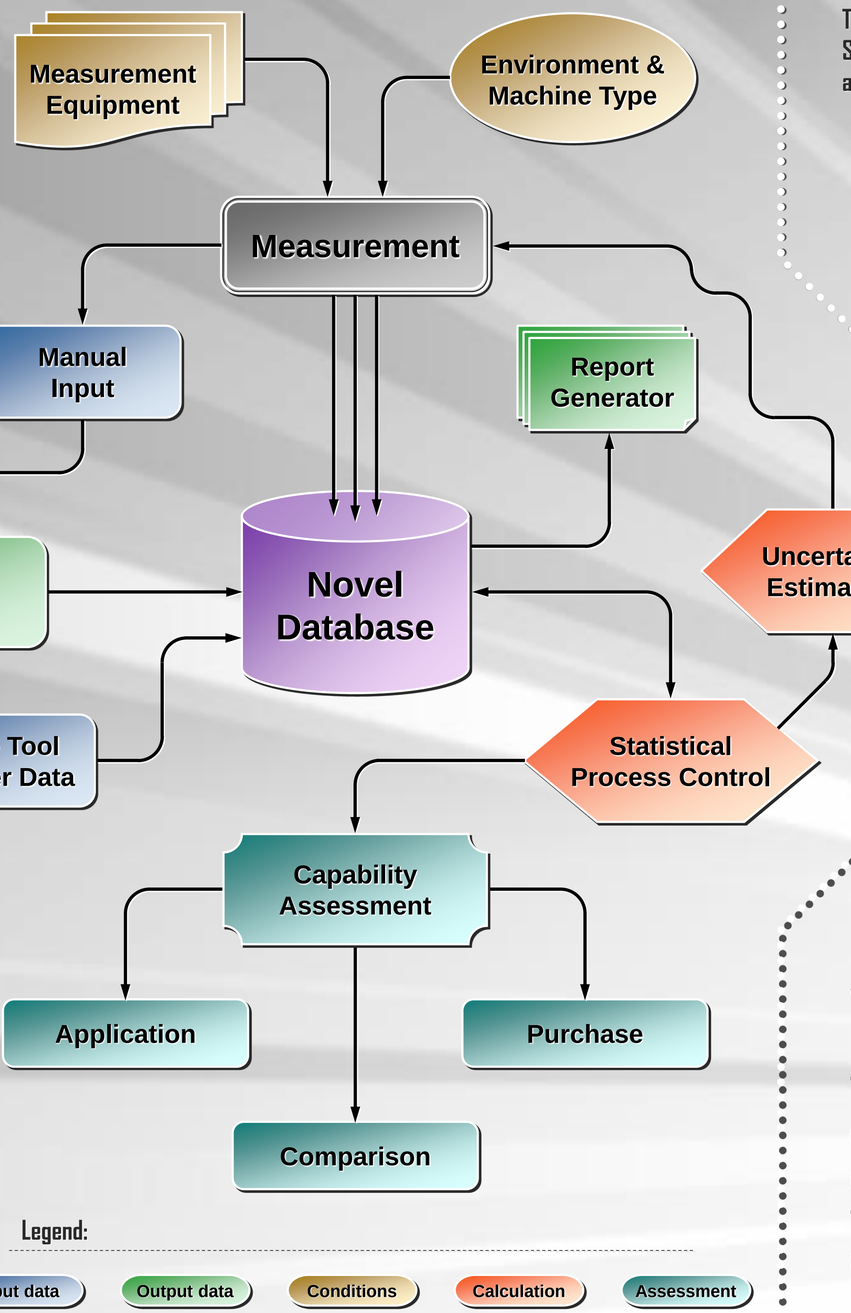

New test development

The alternative to a traditional laser measurement is proposed for a straightness Simple, precise and more effective on long ranges, the method utilizes taut wire and an optical sensor, mounted on a moving table (saddle).

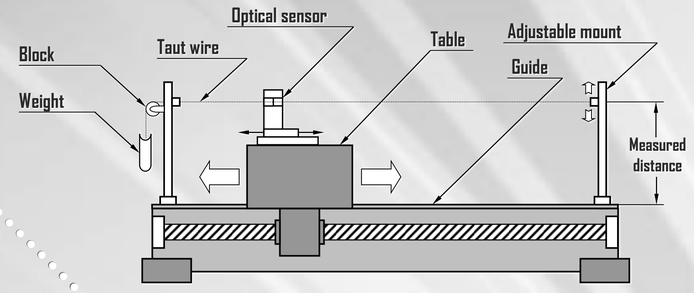

Sensor displacement is measured in a number of points which form a graph showing a combined error of the guide and the wire like shown on the graph:

To remove the wire error a method of sensor shifting is used:



After measuring once another measurement is done with the wire shifted one step forward or backward, and then both wire and guide errors are calculated separately:

$$x_i = x_{i-1} + s_i - c_{i-1}$$

where x – guide error on a step i, c – combined error (measured), and s – combined error on the shifted wire

The accuracy of measurement does not depend on wire surface defects and its straightness, the only factor which affects the result is repeatability of the wire which proved to be very high. This brings final measurement error to a sub-micron level.